

CATALOGUE

**LEADER OF
SECURITY**



Phone

+212 5 39 94 19 89



Email

info@tthgroupe.com



Adresse

27 Avenue Moulay Abdelaziz, Tanger 90.060




QUI SOMMES NOUS

Basée à Tanger, la capitale nord du Royaume du Maroc, TTH COMPANY, Leader of Security, est une société spécialisée dans l'import/export et la distribution de tous types de produits, solutions, services et accessoires de sécurité. Distributeur Officiel de la marque Dahua, avec plus de 10 ans d'exercice à son actif dans le secteur de la sécurité, TTH Company a su se forger une réputation d'acier auprès de ses différents partenaires; grossistes, importateurs, et acteurs de la grande distribution au Maroc et outre-mer, en l'occurrence en Afrique. .

NOTRE VISION



De part son expérience riche et son expertise confirmée, TTH Company se distingue fondamentalement par son approche professionnelle, basée sur une vision claire qui ne cesse de mûrir et qui s'articule principalement autour du gain de confiance de notre clientèle, du renouvellement des compétences et de l'ouverture sur de nouveaux marchés, et ce avec pour ultime objectif; assurer une vie plus sûre et plus intelligente.

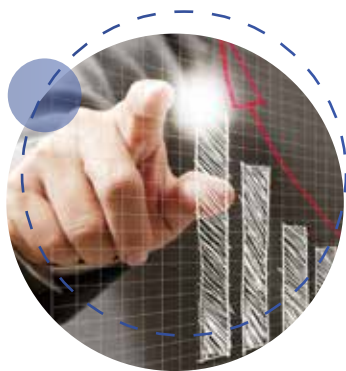

MISSION

Notre mission est de développer des produits, des solutions et des services afin de répondre aux besoins et attentes de nos clients, avec pour objectifs:

- ▶ Prévenir des risques
- ▶ Protéger les personnes et les biens
- ▶ Assurer la sécurité des sites

ENGAGEMENTS

Nous nous engageons constamment à offrir à nos clients les meilleurs solutions et matériels de sécurité aux meilleurs prix, avec un accompagnement et un suivi continu et rigoureux, une écoute active et des services d'exception, car votre satisfaction est notre priorité.



SOMMAIRE

XVR COOPER	03
ENREGISTREURS ANALOGIQUES	03
CAMÉRAS COOPER 2MP ANALOGIQUES	06
CAMÉRAS HDCVI 2MP ANALOGIQUES	06
CAMÉRAS HDCVI 4MP ANALOGIQUES	09
CAMÉRAS COOPER 5MP ANALOGIQUES	10
CAMÉRAS HDCVI 5MP ANALOGIQUES	10
CAMÉRAS HDCVI 8MP ANALOGIQUES	12
CAMÉRAS HDCVI FULL COLORS	13
CAMÉRAS SPEED DOME HDCVI ANALOGIQUES	14
CAMÉRA FISHEYE HDCVI ANALOGIQUE	15
CAMÉRA PANORAMIQUE HDCVI ANALOGIQUE	15
CAMÉRAS IP 2MP	16
CAMÉRAS IP 4MP	18
CAMÉRAS IP 5MP	20
CAMÉRAS IP 6MP	21
CAMÉRAS IP 8MP	22
CAMÉRAS IP 12MP	23
CAMÉRAS IP AI SÉRIE 7	23
CAMÉRAS IP DE RECONNAISSANCE FACIALE	24
CAMÉRAS IP PANORAMIQUE FISHEYE	24
CAMÉRAS ANPR LECTURE DE MATRICULE	25
CAMÉRAS DE COMPTAGE DES PERSONNES	25
CAMÉRAS THERMIQUE	25
CAMÉRAS IP SPEED DOME	26
IMOU	28
ENREGISTREURS RESEAUX NVR	29
SWITCHS	33
CLAVIERS JOYSTICK	34
SOLUTION MOBILE	35
MONITEURS	38
CONTROLE D'ACCES	40
VIDEOPHONE	44
ACCESSOIRES	45
PRODUITS TTLINK	47



XVR1B04-I 2MP

4 Channel Penta-brid 1080N/720p
Cooper 1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports Full channel AI-Coding
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 5 channels IP camera inputs, each channel up to 2MP; Max 20 Mbps incoming bandwidth
- > Up to 4 channels video stream (analog channel) SMD Plus



XVR1B16-I 2MP

16 Channel Penta-brid 1080N/720p Compact
1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports Full-channel AI-Coding
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 18 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps Incoming Bandwidth
- > Long transmission distance over coax cable
- > Up to 8 channels video stream (analog channel) SMD Plus



XVR1B08H 5MP

8 Channel Penta-brid 4M-N/1080P
Cooper 1U Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 12 channels IP camera inputs, each channel up to 6MP; Max 48Mbps incoming bandwidth
- > Long transmission distance over coax cable
- > Supports 1 SATA HDD, up to 6TB
- > Smart Search and Intelligent Video System



XVR1B08-I 2MP

8 Channel Penta-brid 1080N/720p
Cooper 1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports Full channel AI-Coding
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 10 channels IP camera inputs, each channel up to 6MP; Max 40 Mbps incoming bandwidth
- > Up to 4 channels video stream (analog channel) SMD Plus



XVR1B04H 5MP

4 Channel Penta-brid 4M-N/1080P
Cooper 1U Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 6 channels IP camera inputs, each channel up to 6MP; Max 24Mbps incoming bandwidth
- > Long transmission distance over coax cable
- > Supports 1 SATA HDD, up to 6TB
- > Smart Search and Intelligent Video System



XVR1B16H 5MP

16 Channel Penta-brid 4M-N/1080P Cooper
1U 1HDD Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 24 channels IP camera inputs, each channel up to 6MP; Max 96Mbps incoming bandwidth
- > Long transmission distance over coax cable
- > Supports 1 SATA HDD, up to 6TB
- > Smart Search and Intelligent Video System



ENREGISTREURS ANALOGIQUES



XVR4104HS-I 2MP

8 Channel Penta-brid 1080N/720p Compact
1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports Full-channel AI-Coding
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 5 channels IP camera inputs, each channel up to 2MP; Max 32 Mbps incoming bandwidth
- > Up to 4 channels video stream (analog channel) SMD Plus



XVR4108HS-I 2MP

8 Channel Penta-brid 1080N/720p Compact
1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports Full-channel AI-Coding
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 10 channels IP camera inputs, each channel up to 6MP; Max 32 Mbps incoming bandwidth
- > Up to 8 channels video stream (analog channel) SMD Plus





XVR4116HS-I 2MP

16 Channel Penta-brid 720p Compact
1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 video compression
- > Supports Full-channel AI-Coding
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 18 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps
- > Long transmission distance over coax cable
- > Up to 8 channels video stream (analog channel) SMD Plus



XVR5104HS-I3 5MP

4 Channel Penta-brid 5M-N/1080p Compact
1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports Full-channel AI-Coding
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 6 channels IP camera inputs, each channel up to 6MP; Max 32 Mbps incoming bandwidth
- > Up to 1 channel video stream (analog channel) Perimeter Protection
- > Up to 4 channels video stream (analog channel) SMD Plus
- > Up to 1 channel video stream (analog channel) human face recognition
- > IoT & POS functionalities



XVR5116HS-I3 5MP

16 Channel Penta-brid 5M-N/1080P Compact
1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 24 channels IP camera inputs, each channel up to 6MP; Max 128 Mbps incoming bandwidth
- > Up to 2 channels video stream (analog channel) Perimeter Protection
- > Up to 16 channels video stream (analog channel) SMD Plus
- > Up to 2 channels video stream (analog channel) human face recognition
- > IoT & POS functionalities



XVR5232AN-X 5MP

32 Channel Penta-brid 1080P Digital
Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 32 channels IP camera inputs, each channel up to 6MP; Max 128Mbps Incoming Bandwidth
- > Smart Search and Intelligent Video System



XVR4232AN-X 2MP

32 Channel Penta-brid 720P
Digital Video Recorder

- > H.265 video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 18 channels IP camera inputs, each channel up to 6MP; Max 72 Mbps Incoming Bandwidth
- > Long transmission distance over coax cable
- > Supports 2 SATA HDD, up to 10TB



XVR5108HS-I3 5MP

8 Channel Penta-brid 5M-N/1080p Compact
1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports Full-channel AI-Coding
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 12 channels IP camera inputs, each channel up to 6MP; Max 64 Mbps incoming bandwidth
- > Up to 1 channel video stream (analog channel) Perimeter Protection
- > Up to 8 channels video stream (analog channel) SMD Plus
- > Up to 1 channel video stream (analog channel) human face recognition
- > IoT & POS functionalities



XVR5116HS-S2 5MP

16 Channel Penta-brid 1080P Compact
1U Digital Video Recorder

- > Embedded processor
- > H.264+/H.264 video compression
- > Support HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 6/12/24 channels IP camera inputs, each channel up
- > Smart Search and Intelligent Video System



XVR5432L-X 5MP

32 Channel Penta-brid 1080P 1.5U
Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 32 channels IP camera inputs, each channel up to 8MP; Max 128Mbps incoming bandwidth
- > First 16 channels support Tripwire & Intrusion; First 2 channels support Object Abandoned & Missing
- > Supports HDMI2 for spot output





XVR5832S-X 5MP

32 Channel Penta-brid 1080P 2U Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 32 channels IP camera inputs, each channel up to 8MP; Max 128Mbps incoming bandwidth
- > First 16 channels support Tripwire & Intrusion; First 2 channels support Object Abandoned & Missing
- > Supports HDMI2 for spot output



XVR5108H-4KL-I2 8MP

8 Channel Penta-brid 4K-N/5MP Mini 1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 16 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth
- > Up to 2 channels video stream (analog channel) Perimeter Protection
- > Up to 8 channels video stream (analog channel) SMD Plus
- > Up to 2 channels video stream (analog channel) human face recognition
- > IoT & POS functionalities



XVR7104HE-4KL-X 8MP

4 Channel Penta-brid 4K Mini 1U Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Supports 8 channels of IPC access, each channel up to 8MP input; Max 32Mbps Incoming Bandwidth
- > IoT & POS functionalities
- > Smart Search and Intelligent Video System



XVR7116HE-4KL-X 8MP

16 Channel Penta-brid 4K Mini 1U Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Supports 32 channels of IPC access, each channel up to 8MP input; Max 128Mbps Incoming Bandwidth
- > IoT & POS functionalities
- > Smart Search and Intelligent Video System



XVR5104H-4KL-I2 8MP

4 Channel Penta-brid 4K-N/5MP Mini 1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 8 channels IP camera inputs, each channel up to 8MP; Max 64 Mbps incoming bandwidth
- > Up to 2 channels video stream (analog channel) Perimeter Protection
- > Up to 4 channels video stream (analog channel) SMD Plus
- > Up to 2 channels video stream (analog channel) human face recognition
- > IoT & POS functionalities



XVR5116H-4KL-I2 8MP

16 Channel Penta-brid 4K-N/5MP Mini 1U 1HDD WizSense Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Max 32 channels IP camera inputs, each channel up to 8MP; Max 128 Mbps incoming bandwidth
- > Up to 2 channels video stream (analog channel) Perimeter Protection
- > Up to 16 channels video stream (analog channel) SMD Plus
- > Up to 2 channels video stream (analog channel) human face recognition
- > IoT & POS functionalities



XVR7108HE-4KL-X 8MP

8 Channel Penta-brid 4K Mini 1U Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Supports 16 channels of IPC access, each channel up to 8MP input; Max 64 Mbps Incoming Bandwidth
- > IoT & POS functionalities
- > Smart Search and Intelligent Video System



XVR7216A-4KL-X 8MP

16 Channel Penta-brid 4K 1U Digital Video Recorder

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Supports 32 channels of IPC access, each channel up to 8MP input; Max 128Mbps Incoming Bandwidth
- > IoT & POS functionalities
- > Smart Search and Intelligent Video System





XVR7416L-4KL-X 8MP

16 Channel Penta-brid 4K 1.5U Digital Video Recorder SeriesPro

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Supports 32 channels of IPC access, each channel up to 12MP input; Max 128Mbps incoming bandwidth
- > IoT & POS functionalities
- > All channels support Tripwire & Intrusion; First 4 channels support Object Abandoned & Missing
- > Supports HDMI2 for spot output



XVR7816S-4KL-X 8MP

16 Channel Penta-brid 4K 2U Digital Video Recorder SeriesPro

- > H.265+/H.265 dual-stream video compression
- > Supports HDCVI/AHD/TVI/CVBS/IP video inputs
- > Supports 32 channels of IPC access, each channel up to 12MP input; Max 128Mbps incoming bandwidth
- > IoT & POS functionalities
- > All channels support Tripwire & Intrusion; First 4 channels support Object Abandoned & Missing
- > Supports HDMI2 for spot output



CAMÉRAS COOPER 2MP ANALOGIQUES



HAC-T2A21P

2MP HDCVI IR Eyeball Camera

- > Max. 30fps@1080P
- > HD and SD output switchable
- > 3.6mm fixed lens (2.8mm, 6mm optional)
- > Max. IR length 20m, Smart IR
- > IP67, DC12V



HAC-B2A21P

2MP HDCVI IR Eyeball Camera

- > Max 30fps@1080P
- > HD and SD output switchable
- > 3.6mm fixed lens (2.8mm optional)
- > Max. IR length 30m, Smart IR
- > IP67, DC12V



CAMÉRAS HDCVI 2MP ANALOGIQUES



HAC-HDW1200MP

2MP HDCVI IR Eyeball Camera

- > Max 30fps@1080P
- > HD and SD output switchable
- > 3.6mm fixed lens (2.8mm optional)
- > Max. IR length 30m, Smart IR
- > IP67, DC12V



HAC-HFW1200TP

2MP HDCVI IR Bullet Camera

- > Max 30fps@1080P
- > HD and SD output switchable
- > 3.6mm fixed lens (2.8mm, 6mm optional)
- > Built-in mic(-A)
- > Max. IR length 30m, Smart IR
- > IP67, DC12V





HAC-HFW1200THP-I4

2MP HDCVI IR Bullet Camera

- > Max 30fps@1080P
- > HD and SD output switchable
- > 3.6mm fixed lens (2.8mm, 6mm optional)
- > Max. IR length 40m, Smart IR
- > IP67, DC12V



HAC-HFW1200THP-I8

2MP HDCVI IR Bullet Camera


- > Max 30fps@1080P
- > HD and SD output switchable
- > 3.6mm fixed lens (2.8mm, 6mm, 8mm optional)
- > Max. IR length 80m, Smart IR
- > IP67, DC12V



HAC-HDW1200TLMQP-A

2MP HDCVI IR Eyeball Camera

- > Max 30fps@1080P
- > Quick-to-install eyeball saves installation time
- > CVI/CVBS/AHD/TVI switchable
- > 3.6mm fixed lens (2.8mm optional)
- > Built-in mic(-A)
- > Max. IR length 30m, Smart IR
- > IP67, DC12V



HAC-HFW1200CMP-A

2MP HDCVI IR Bullet Camera

- > Max 30fps@1080P
- > CVI/CVBS/AHD/TVI switchable
- > 3.6mm fixed lens (2.8mm, optional)
- > Built-in mic(-A)
- > Max. IR length 30m, Smart IR
- > IP67, DC12V



HAC-HDW1200EMP-A

2MP HDCVI IR Eyeball Camera

- > Max 30fps@1080P
- > HD and SD output switchable
- > Built-in mic
- > 3.6mm fixed lens (2.8mm optional)
- > Max. IR length 50m, Smart IR
- > IP67, DC12V



HAC-HDW1200TP-Z

2MP HDCVI IR Eyeball Camera

- > Max 30fps@1080P
- > HD and SD output switchable
- > 2.7-12mm motorized lens
- > Built-in mic(-A)
- > Max. IR length 60m, Smart IR
- > IP67, DC12V



HAC-HDBW1200RP-Z

2MP HDCVI IR Dome Camera

- > Max 30fps@1080P
- > HD and SD output switchable
- > 2.7-12mm motorized lens
- > Max. IR length 30m, Smart IR
- > IP67, IK10, DC12V



HAC-HFW1200RP-Z-A

2MP HDCVI IR Bullet Camera

- > Max 30fps@1080P
- > HD and SD output switchable
- > 2.7-12mm motorized lens
- > Built-in mic(-A)
- > Max. IR length 60m, Smart IR
- > IP67, DC12V





HAC-HDBW2241RP-Z

2MP Starlight HDCVI IR Dome Camera

- > Starlight, 120dB true WDR, 3DNR
- > Max. 30fps@1080P
- > HD/SD output switchable
- > Audio in interface
- > 2.7-13.5mm motorized lens
- > Max. IR length 30m, Smart IR
- > IP67, IK10, DC12V



HAC-HFW2241TP-Z-A

2MP Starlight HDCVI IR Bullet Camera

- > Starlight, 120dB True WDR, 3DNR
- > Max. 30fps@1080P
- > HD/SD switchable
- > Audio in interface, built-in mic
- > 2.7-13.5mm motorized lens
- > Max. IR length 80m, Smart IR
- > IP67, AC24V/DC12V±30%



HAC-ME1200EQP-L

2MP HDCVI Active Deterrence Camera

- > Max 30 fps@1080p
- > CVI/CVBS/AHD/TVI switchable
- > Active deterrence with warm light
- > Built-in PIR, 10 m/110° detecting range/angle
- > Quick-to-install eyeball save installation time
- > 3.6 mm fixed lens (2.8 mm optional)
- > Max. IR length 30 m, Smart IR
- > IP67, 12 V DC



HAC-ME1200BP-L

2MP HDCVI Active Deterrence Camera

- > Max 30 fps@1080p
- > CVI/CVBS/AHD/TVI switchable
- > Active deterrence with warm light
- > Built-in PIR, 10 m/110° detecting range/angle
- > 3.6 mm fixed lens (2.8 mm optional)
- > Max. IR length 30 m, Smart IR
- > IP67, 12V DC



HAC-HDW3200LP

2MP HDCVI IR Eyeball Camera

- > Max 30fps@1080p
- > CVI/CVBS/AHD/TVI switchable
- > Built-in Mic
- > 2.1 mm fixed lens
- > Max. IR length 3 m, Smart IR
- > DC12V



HAC-HDW3200GP

2MP HDCVI IR Miniature Eyeball Camera

- > Max 30fps@1080p
- > CVI/CVBS/AHD/TVI switchable
- > Built-in Mic
- > 3.6 mm fixed lens (2.8 mm optional)
- > Max. IR length 20 m, Smart IR
- > IP67, DC12V



CAMÉRAS HDCVI 4MP ANALOGIQUES




HAC-HDW1400MP
4MP HDCVI IR Eyeball Camera

- > Max 30fps@4MP
- > HD and SD output switchable
- > 3.6mm fixed lens (2.8mm optional)
- > Max. IR length 30m, Smart IR
- > IP67, DC12V



HAC-HFW1400TP
4MP HDCVI IR Bullet Camera

- > Max 30fps@4MP
- > HD and SD output switchable
- > 3.6mm fixed lens (2.8mm, 6mm optional)
- > Max. IR length 30m, Smart IR
- > IP67, DC12V




HAC-HDW1400EMP-A
4MP HDCVI IR Eyeball Camera

- > Max 30fps@4MP
- > HD and SD output switchable
- > 3.6mm fixed lens (2.8mm, 6mm optional)
- > Built-in mic (-A)
- > Max. IR length 50m, Smart IR
- > IP67, DC12V



HAC-HFW1400TP-A
4MP HDCVI IR Bullet Camera

- > Max 30fps@4MP
- > HD and SD output switchable
- > 3.6mm fixed lens (2.8mm, 6mm optional)
- > Max. IR length 30m, Smart IR
- > IP67, DC12V



HAC-HDBW1400RP-Z
4MP HDCVI IR Dome Camera

- > Max 30fps@4MP
- > HD and SD output switchable
- > 2.7-12mm motorized lens
- > Max. IR length 30m, Smart IR
- > IP67, IK10, DC12V



HAC-HFW1400RP-Z-IRE6
4MP HDCVI IR Bullet Camera

- > Max 30fps@4MP
- > HD and SD output switchable
- > 2.7-12mm motorized lens
- > Max. IR length 60m, Smart IR
- > IP67, DC12V



CAMÉRAS COOPER 5MP ANALOGIQUES



HAC-T2A51P
5MP HDCVI Fixed IR Eyeball Camera



- > Max. 25 fps@5MP (16:9 video output)
- > CVI/CVBS/AHD/TVI switchable
- > 3.6 mm fixed lens (2.8 mm optional)
- > Max. IR length 20 m, Smart IR
- > IP67, DC12V



HAC-B2A51P

5MP HDCVI Fixed IR Bullet Camera



- > Max. 25 fps@5MP (16:9 video output)
- > CVI/CVBS/AHD/TVI switchable
- > 3.6mm fixed lens (2.8 mm optional)
- > Max. IR length 20 m, Smart IR
- > IP67, DC12V

CAMÉRAS HDCVI 5MP ANALOGIQUES



HAC-HDW1500TLMQ-A

5MP Starlight HDCVI Quick-to-install
IR Eyeball Camera




- > Max 25 fps@5MP (16:9 video output)
- > Quick-to-install eyeball saves installation time
- > CVI/CVBS/AHD/TVI switchable
- > 3.6 mm fixed lens (2.8 mm optional)
- > Built-in mic(-A)
- > Max. IR length 30 m, Smart IR
- > IP67, DC12V



HAC-HDW1500TLMQP

5MP Starlight HDCVI Quick-to-install
IR Eyeball Camera


- > Max 25 fps@5MP (16:9 video output)
- > Quick-to-install eyeball saves installation time
- > CVI/CVBS/AHD/TVI switchable
- > 3.6 mm fixed lens (2.8 mm optional)
- > Max. IR length 30 m, Smart IR
- > IP67, DC12V



HAC-HFW1500CMP

5MP Starlight HDCVI IR Bullet Camera


- > Max 25 fps@5MP (16:9 video output)
- > CVI/CVBS/AHD/TVI switchable
- > 3.6 mm fixed lens (2.8 mm optional)
- > Max. IR length 30m, Smart IR
- > IP67, DC12V



HAC-HFW1500TP

5MP Starlight HDCVI IR Bullet Camera


- > Max 25fps@5MP (16:9 video output)
- > CVI/CVBS/AHD/TVI switchable
- > 3.6 mm fixed lens (2.8 mm optional)
- > Max. IR length 30 m, Smart IR
- > IP67, DC12V



HAC-HFW1500THP-I4

5MP Starlight HDCVI IR Bullet Camera

- > Max 25 fps@5MP (16:9 video output)
- > CVI/CVBS/AHD/TVI switchable
- > 3.6 mm fixed lens (6 mm optional)
- > Max. IR length 40 m, Smart IR
- > IP67, DC12V






HAC-HFW1500THP-I8

5MP Starlight HDCVI IR Bullet Camera

- > Max 25fps@5MP (16:9 video output)
- > CVI/CVBS/AHD/TVI switchable
- > 3.6 mm fixed lens (6 mm, 8 mm optional)
- > Max. IR length 80 m, Smart IR
- > IP67, DC12V



HAC-HDW1500TP-Z-A

5MP Starlight HDCVI IR Eyeball Camera

- > Max 25 fps@5MP (16:9 video output)
- > CVI/CVBS/AHD/TVI switchable
- > 2.7-12 mm motorized lens
- > Built-in mic
- > Max. IR length 60 m, Smart IR
- > IP67, AC24V/DC12V



HAC-HDBW1500RP-Z

5MP Starlight HDCVI IR Dome Camera

- > Max 25 fps@5MP (16:9 video output)
- > CVI/CVBS/AHD/TVI switchable
- > 2.7-12 mm motorized lens
- > Max. IR length 30 m, Smart IR
- > IP67, IK10, DC12V



HAC-HFW1500RP-Z-IRE6-A

5MP HDCVI IR Bullet Camera

- > Max 25 fps@5MP (16:9 video output)
- > CVI/CVBS/AHD/TVI switchable
- > 2.7-12 mm motorized lens
- > Built-in mic(-A)
- > Max. IR length 60 m, Smart IR
- > IP67, DC12V



HAC-HDBW2501RP-Z

5MP Starlight HDCVI IR Dome Camera

- > Max 25 fps@5MP (16:9 video output)
- > Starlight, 120 dB true WDR, 3D NR
- > CVI/CVBS/AHD/TVI switchable
- > 2.7 mm-13.5 mm motorized lens
- > Max. IR length 30 m, Smart IR
- > IP67, IK10, 12V DC±30%



HAC-HFW2501TP-Z-A

5MP Starlight HDCVI IR Bullet Camera

- > Starlight, 120dB true WDR, 3DNR
- > Max. 20fps@5MP
- > HD/SD output switchable
- > Audio in interface, built-in mic
- > 2.7-13.5mm motorized lens
- > Max. IR length 80m, Smart IR
- > IP67, DC12V±30%



HAC-ME1500BP-LED

5MP HDCVI Active Deterrence Camera

- > Max 25fps@5MP (16:9 video output)
- > CVI/CVBS/AHD/TVI switchable
- > Active deterrence with warm light
- > Built-in PIR, 10 m/110°detecting range/angle
- > 3.6 mm fixed lens (2.8 mm optional)
- > Max. IR length 30 m, Smart IR
- > IP67, 12 V DC



HAC-ME1500EP-LED

5MP HDCVI PIR Eyeball Camera

- > Max 20fps@5MP
- > HD and SD output switchable
- > 2.8mm/3.6mm fixed lens
- > 10m/110°detecting range/angle
- > Max. IR length 20m, Smart IR
- > IP67, DC12V





HAC-ME1500CP

5MP HDCVI Active Deterrence Camera



- > Max 20fps@5MP
- > HD and SD output switchable
- > 2.8mm fixed lens (3.6mm optional)
- > Max. IR length 20m, Smart IR
- > Built-in PIR, 14±1m/110° detecting range/angle
- > Active deterrence with white light & siren
- > IP67, DC12V

CAMÉRAS HDCVI 8MP ANALOGIQUES



HAC-HFW1800TP

4K Real-time HDCVI IR Bullet Camera

- > Max. 4K resolution, real-time video transmission
- > CVI/CVBS/AHD/TVI switchable
- > Fixed lens (2.8mm; 3.6mm; 6mm optional)
- > Max. IR length 30m, Smart IR
- > IP67, 12V±30%DC



HAC-HFW1800THP-I4

4K Real-time HDCVI IR Bullet Camera

- > Max. 4K resolution, real-time video transmission
- > CVI/CVBS/AHD/TVI switchable
- > Fixed lens (2.8mm; 3.6mm; 6mm optional)
- > Max. IR length 40m, Smart IR
- > IP67, 12V±30%DC



HAC-HFW1800THP-I8

4K Real-time HDCVI IR Bullet Camera



- > Max. 4K resolution, real-time video transmission
- > CVI/CVBS/AHD/TVI switchable
- > Fixed lens (3.6mm; 6mm optional)
- > Max. IR length 80m, Smart IR
- > IP67, 12V±30%DC



HAC-HDW1800TLP-A

4K Real-time HDCVI IR Eyeball Camera

- > Max. 4K resolution, real-time video transmission
- > CVI/CVBS/AHD/TVI switchable
- > Built-in mic (-A)
- > Fixed lens (2.8mm; 3.6mm optional)
- > Max. IR length 30m, Smart IR
- > IP67, 12V±30%DC



HAC-HFW1800TP-A

4K Real-time HDCVI IR Bullet Camera

- > Max. 4K resolution, real-time video transmission
- > CVI/CVBS/AHD/TVI switchable
- > Built-in mic (-A)
- > Fixed lens (2.8mm; 3.6mm; 6mm optional)
- > Max. IR length 30m, Smart IR
- > IP67, 12V±30%DC



HAC-HDW1801TP-Z-A

5MP Starlight HDCVI IR Eyeball Camera

- > 120dB True WDR, 3DNR
- > Max. 4K resolution
- > CVI/CVBS/AHD/TVI switchable
- > Auto focus, 2.7-13.5mm motorized lens
- > Built-in mic (-A)
- > Max. IR length 60m, smart IR
- > IP67, 12V ±30% DC



HAC-HFW1801RP-Z-IRE6-A

4K Real-time HDCVI IR Bullet Camera

- > 120dB true WDR, 3D NR
- > Max. 4K resolution
- > CVI/CVBS/AHD/TVI switchable
- > Auto focus, 2.7-13.5mm motorized lens
- > Built-in mic (-A)
- > Max. IR length 60m, smart IR
- > IP67, 12V ±30% DC



CAMÉRAS FULL-COLOR



HAC-HDW1239TLQP-A-LED

2MP Full-color HDCVI Quick-to-install Eyeball Camera

- > 24/7 color imaging, Max. 30 fps@1080p
- > 20 m illumination distance
- > Super Adapt, 130 dB true WDR, 3D NR
- > Built-in mic (-A)
- > Quick-to-install eyeball saves installation time
- > 3.6 mm fixed lens (2.8 mm optional)
- > CVI/CVBS/AHD/TVI switchable
- > IP67, DC 12 V



HAC-HFW1239TP-A-LED

2MP Full-color HDCVI Bullet Camera

- > 24/7 color imaging, Max. 30 fps@1080p
- > 20 m illumination distance
- > Super Adapt, 130 dB true WDR, 3D NR
- > Built-in mic (-A)
- > 3.6 mm fixed lens (2.8 mm optional)
- > CVI/CVBS/AHD/TVI switchable
- > IP67, DC 12 V



HAC-HDW1509TP-A-LED

5MP Full-color HDCVI Eyeball Camera

- > Max 25 fps@5MP (16:9 video output)
- > 120 dB true WDR, 3D NR
- > 24/7 color imaging
- > 40 m illumination distance
- > CVI/CVBS/AHD/TVI switchable
- > Built-in mic (-A)
- > 3.6 mm fixed lens (2.8 mm optional)
- > IP67, 12 V D



HAC-HFW1509TP-A-LED

5MP Full-color HDCVI Bullet Camera

- > Max 25 fps@5MP (16:9 video output)
- > 120 dB true WDR, 3D NR
- > 24/7 color imaging
- > 20 m illumination distance
- > CVI/CVBS/AHD/TVI switchable
- > Built-in mic (-A)
- > 3.6 mm fixed lens (2.8 mm optional)
- > IP67, 12 V DC



HAC-HFW1509TLMP-A-LED

5MP Full-color HDCVI Bullet Camera

- > Max 25 fps@5MP (16:9 video output)
- > 120 dB true WDR, 3D NR
- > 24/7 color imaging
- > 40 m illumination distance
- > CVI/CVBS/AHD/TVI switchable
- > Built-in mic (-A)
- > 3.6 mm fixed lens (2.8 mm optional)
- > IP67, 12 V DC



HAC-HDW1509TLP-A-LED

5MP Full-color Starlight HDCVI Eyeball Camera

- > Full-color starlight
- > 20 m LED distance
- > Max. 20fps@5MP
- > CVI/CVBS/AHD/TVI switchable
- > Built-in mic (-A)
- > 3.6 mm fixed lens (2.8 mm optional)
- > IP67, 12V±30% DC



CAMÉRAS SPEED DOME HDCVI ANALOGIQUES



SD22204-GC-LB

2MP 4x PTZ HDCVI Camera

- > 1/2.7" 2Megapixel CMOS
- > Powerful 4x optical zoom
- > 120dB true WDR, 3D DNR
- > Max. 25/30fps@1080P, 25/30/50/60fps@720P
- > IP66, IK10



SD42215-HC-LA

2MP 15x Starlight HDCVI PTZ Camera

- > 1/2.8" 2Megapixel STARVIS™ CMOS
- > Powerful 15x optical zoom
- > Starlight technology
- > 120 dB true WDR, 3D DNR
- > Max. 25/30 fps@1080P, 25/30/50/60 fps@720P
- > IK10
- > IP66



SD49225-HC-LA

2MP 25x Starlight IR PTZ HDCVI Camera

- > 1/2.8" 2Megapixel STARVIS™ CMOS
- > Powerful 25x optical zoom
- > Starlight technology
- > 120 dB true WDR, 3D DNR
- > Max. 25/30 fps@1080P, 25/30/50/60 fps@720P
- > IR distance up to 100 m
- > IP66



SD59230I-HC

2MP 30x Starlight IR PTZ HDCVI Camera

- > 1/2.8" 2Megapixel STARVIS™ CMOS
- > Powerful 30x optical zoom
- > Starlight technology
- > 120dB true WDR, 3D DNR
- > Max. 25/30fps@1080P, 25/30/50/60fps@720P
- > IR distance up to 150m
- > IP66



SD6C230I-HC

2 Megapixel 30x Full HD HDCVI IR
PTZ Dome Camera



- > 30x optical zoom
- > Max. 25/30fps @1080P(1920x1080) & 50/60fps @720P resolution
- > DWDR, Day/Night(ICR), Ultra DNR, Auto iris, Auto focus
- > Control over coaxial cable, long distance real-time transmission
- > HD and SD switchable
- > Max 240°/s pan speed, 360° endless pan rotation
- > Up to 300 presets, 5 auto scan, 8 tour, 5 pattern
- > Built-in 2/1 alarm in/out
- > Support intelligent 3D positioning with DH-SD protocol
- > IR Distance up to 100m
- > IP66, OSD

CAMÉRA FISHEYE HDCVI ANALOGIQUES



HAC-EW2501P 5MP HDCVI IR-Fisheye Camera



- > 1/2.8" 5Megapixel progressive scan CMOS
- > Panoramic fisheye lens
- > Max. 20fps@5MP
- > Built-in Mic
- > 120db true WDR, Starlight, 2D&3D NR
- > Max. IR length 10m, Smart IR
- > DC12V

CAMÉRA PANORAMIQUE HDCVI ANALOGIQUE

HAC-PFW3601P-A180-AC24



3X2MP Multi-Sensor Panoramic HDCVI IR-Bullet Camera



- > Three 1/2.8" 2Megapixel progressive scan CMOS
- > 1 panoramic view & 3 individual 2MP video output simultaneously
- > Max. 15fps@4K, 25fps@4M
- > 120db true WDR, 2D&3D NR
- > HDCVI starlight technology
- > Max. 20m IR distance
- > IP67&IK10 ingress protection
- > Up to 500m transmission with RG59 coaxial cable

CAMÉRAS IP 2MP




IPC-HDW1230SP-S5 2MP Entry IR Fixed-Focal Eyeball Network Camera

- > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 2MP (1920 × 1080) @25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in efficient IR illuminator, and the max. illumination distance is 30 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various
- > Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access
- > 12V DC/PoE power supply
- > IP67 protection



IPC-HFW1230SP-S5 2MP Entry IR Fixed-Focal Bullet Network Camera

- > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 2MP (1920 × 1080) @25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in efficient IR illuminator, and the max. illumination distance is 30 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access
- > 12V DC/PoE power supply
- > IP67 protection





IPC-HFW2231TP-ZS

2MP WDR IR Bullet Network Camera



- > 1/2.8" 2Megapixel progressive StarvisTMC CMOS
- > H.265 & H.264 dual-stream encoding
- > 25/30fps@1080P(1920×1080)
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > Micro SD card slot, up to 128GB
- > 2.7-13.5mm varifocal lens
- > Max IR LEDs Length 60m
- > IP67, IK10(optional), PoE+



IPC-HDBW1230EP-S5

2MP Entry IR Fixed-Focal Dome Network Camera

- > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 2MP (1920 × 1080) @25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in efficient IR illuminator, and the max. illumination distance is 30 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, DWDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Abnormality detection: Motion detection, video tampering, network disconnection, IP conflict, illegal access
- > 12V DC/PoE power supply
- > IP67, IK10 protection



IPC-HFW2231TP-ZS-S2

2MP Lite IR Vari-focal Bullet Network Camera

- > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- > Outputs 2MP (1920 × 1080)@25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 60 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection
- > Supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67 protection, IK10 protection (optional)



IPC-HDBW2231RP-ZS-S2

2MP Lite IR Vari-focal Dome Network Camera

- > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- > Outputs 2MP (1920 × 1080)@25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 40 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection
- > Supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67, IK10 protection



IPC-HFW2231TP-ZAS-S2

2MP Lite IR Vari-focal Bullet Network Camera

- > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- > Outputs 2MP (1920 × 1080)@25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 60 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, local alarm, voltage detection, audio abnormal
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67 protection, IK10 protection (optional)





IPC-HDBW4231EP-AS-S4

2MP IR Mini Dome Network Camera

- > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 triple-stream encoding
- > 50/60fps@1080P(1920×1080)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.8mm fixed lens (3.6mm, 6mm optional)
- > 1/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 30m
- > Micro SD memory, IP67, IK10, PoE



IPC-HDBW4231EP-ASE

2MP Lite IR Vari-focal Dome Network Camera

- > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 triple-stream encoding
- > 50/60fps@1080P(1920×1080)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.8mm fixed lens (3.6mm, 6mm optional)
- > 1/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 30m
- > Micro SD memory, IP67, IK10, PoE



IPC-HDBW5241RP-ASE

2MP Lite IR Vari-focal Dome Network Camera

- > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > 25/30 fps@1080P (1920 × 1080)
- > WDR (120 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS
- > 2.8 mm fixed lens (3.6 mm, 6.0 mm optional)
- > 1/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 50 m
- > Micro SD memory, IP67, IK10



IPC-HDBW3241RP-ZS

2MP WDR IR Bullet Network Camera



IPC-HFW4231EP-SE

2MP WDR IR Mini Bullet Network Camera

- > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 triple-stream encoding
- > 50/60fps@1080P(1920×1080)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 3.6mm fixed lens (6mm optional)
- > Max. IR LEDs Length 40m
- > Micro SD Memory, IP67, PoE



IPC-HFW4231TP-ASE

2MP WDR IR Mini Bullet Network Camera

- > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 triple-stream encoding
- > 50/60fps@1080P(1920×1080)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 3.6mm fixed lens (6mm, 8mm, 12mm optional)
- > Max. IR LEDs Length 80m
- > Micro SD Memory, IP67, IK10, PoE



IPC-HFW5231EP-ZE

2MP WDR IR Bullet Network Camera

- > 1/2.8" 2Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 triple-stream encoding
- > 50/60fps@1080P(1920×1080)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.7mm ~13.5mm motorized lens
- > 2/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 50m
- > Micro SD memory, IP67, IK10, PoE



- > 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 2MP (1920 × 1080)@30 fps
- > H.265 codec, high compression rate, low bit rate
- > Built-in IR LED, max. IR distance: 40 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Intelligent detection: Intrusion, tripwire (support the classification and accurate detection of vehicle and human)
- > Supports max. 256 G Micro SD card
- > 12V DC/POE power supply
- > IP67, IK10 protection
- > SMD Plus

CAMÉRAS IP 4MP



IPC-HDBW2431EP-S-S2

2MP IR Mini Dome Network camera

- > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition
- > Outputs 4MP (2560 × 1440)@25/30 fps, max. supports 4MP (2688 × 1520) @ 20 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 30 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection
- > Supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67, IK10 protection



IPC-HFW2431SP-S-S2

4MP Lite IR Fixed-focal Bullet Network Camera

- > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition
- > Outputs 4MP (2560 × 1440)@25/30fps, Max. supports 4MP (2688 × 1520)@20 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 30 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection
- > Supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67 protection



IPC-HDBW2431RP-ZS-S2

4MP Lite IR Vari-focal Dome Network Camera

- > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition
- > Outputs 4MP (2560 × 1440)@25/30 fps, Max. supports 4MP (2688 × 1520)@20 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 40 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection
- > Supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67, IK10 protection



IPC-HFW2431TP-ZAS-S2

4MP Lite IR Vari-focal Bullet Network Camera

- > 4MP, 1/3" CMOS image sensor, low illuminance, high image definition
- > Outputs 4MP (2560 × 1440)@25/30 fps, max. supports 4MP (2688 × 1520)@20 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 60 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, local alarm, voltage detection, audio abnormal
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67 protection, IK10 protection (optional)



IPC-HDBW5442RP-ASE

4MP WDR IR Dome WizMind Network Camera

- > 1/1.8" 4Megapixel progressive scan CMOS
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > 25/30 fps@2688 × 1520, 50/60 fps@1080P (1920 × 1080)
- > WDR (140 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS
- > 2.8 mm fixed lens (3.6 mm, 6.0 mm optional)
- > 1/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 50 m
- > Micro SD memory, IP67, IK10





IPC-HFW4431EP-SE

4MP WDR IR Mini Bullet Network Camera

- > 1/3" 4Megapixel progressive scan CMOS
- > H.265&H.264 triple-stream encoding
- > 25/30fps@4M(2688×1520)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 3.6mm fixed lens (6mm, 8mm, 12mm optional)
- > Max. IR LEDs Length 80m
- > Micro SD memory, IP67, IK10, PoE



IPC-HFW4431TP-ASE

4MP WDR IR Mini Bullet Network Camera

- > 1/3" 4Megapixel progressive scan CMOS
- > H.265&H.264 triple-stream encoding
- > 25/30fps@4M(2688×1520)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 3.6mm fixed lens (6mm, 8mm, 12mm optional)
- > Max. IR LEDs Length 80m
- > Micro SD memory, IP67, IK10, PoE



IPC-HDBW5431RP-ZE

4MP WDR IR Dome Network Camera

- > 1/3" 4Megapixel progressive scan CMOS
- > H.265&H.264 triple-stream encoding
- > 25/30fps@4Mp(2688×1520)
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.7mm ~13.5mm motorized lens
- > Max. IR LEDs Length 50m
- > IP67, IK10, PoE
- > Micro SD card memory



IPC-HFW5431EP-ZE

4MP WDR IR Bullet Network Camera

- > 1/3" 4Megapixel progressive scan CMOS
- > H.265&H.264 triple-stream encoding
- > 25/30fps@4Mp(2688×1520)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.7mm ~13.5mm motorized lens
- > 2/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 50m
- > Micro SD memory, IP67, IK10, PoE



IPC-HDBW5442EP-ZE

4MP IR Vari-focal Dome WizMind Network Camera

- > 1/1.8" 4Megapixel progressive scan CMOS
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > 25/30 fps@2688 × 1520, 50/60 fps@1080P (1920 × 1080)
- > WDR (140 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS
- > 2.7 mm~12.0 mm motorized lens
- > 1/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 40 m
- > Micro SD memory, IP67, IK10
- > SMD Plus



IPC-HFW5442HP-ZE

4MP WDR IR Bullet Network Camera

- > 4MP, 1/1.8" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 4MP (2688 × 1520) @30 fps
- > Max. IR distance: 60 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Alarm: 3 in, 2 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card
- > 12V DC/PoE power supply
- > ePoE, IP67, IK10 protection
- > Anti-corrosion coating (optional)
- > Supports junction box mount
- > SMD Plus



CAMÉRAS IP 5MP



IPC-HDBW2531EP-S-S2 5MP WDR IR Dome Network Camera

- > 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 5MP (2592 × 1944) @20 fps, and supports 2688 × 1520 (2688 × 1520) @25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 30 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection
- > Supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67, IK10 protection



IPC-HDBW2531RP-ZS-S2 5MP WDR IR Dome Network Camera

- > 1/2.7" 5Megapixel progressive CMOS
- > H.265 & H.264 dual-stream encoding
- > 15fps@5M(2592×1944)&25/30fps@3M(2304×1296)
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > Micro SD card slot, up to 128GB
- > 2.7~13.5mm varifocal lens
- > Max IR LEDs Length 30m
- > IP67, IK10, PoE



IPC-HDBW5541RP-ASE 5MP WDR IR Dome Network Camera

- > 1/2.7" 5Megapixel progressive scan CMOS
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various
- > 20 fps@2592 × 1944, 50/60 fps@1080P (1920 × 1080)
- > WDR (120 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS
- > 2.8 mm fixed lens (3.6 mm, 6.0 mm optional)
- > 1/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 50 m
- > Micro SD memory, IP67, IK10



IPC-HFW2531SP-S-S2 4MP Lite IR Fixed-focal Bullet Network Camera

- > 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 5MP (2592 × 1944) @20 fps, and supports 2688 × 1520 (2688 × 1520) @25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 30 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnected, IP conflict, illegal access, voltage detection
- > Supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67 protection



IPC-HFW2531TP-ZS-S2 4MP WDR IR Mini Bullet Network Camera

- > 1/2.7" 5Megapixel progressive CMOS
- > H.265 & H.264 dual-stream encoding
- > 15fps@5M(2592×1944)&25/30fps@3M(2304×1296)
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > Micro SD card slot, up to 128GB
- > 2.7~13.5mm varifocal lens
- > Max IR LEDs Length 60m
- > IP67, PoE+



IPC-HFW5541TP-ASE 4MP WDR IR Mini Bullet Network Camera

- > 1/2.7" 5Megapixel progressive scan CMOS
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > 20 fps@2592 × 1944, 50/60 fps@1080P (1920 × 1080)
- > WDR (120 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS
- > 2.8 mm fixed lens (3.6 mm, 6.0 mm, 8.0 mm, 12.0 mm optional)
- > 1/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 80 m
- > Micro SD memory, IP67, IK10





IPC-HDBW5541EP-ZE

5MP IR Vari-focal Dome WizMind Network Camera

- > 1/2.7" 5Megapixel progressive scan CMOS
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > 20 fps@2592 × 1944, 50/60 fps@1080P (1920 × 1080)
- > WDR (120 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS
- > 2.7 mm–13.5 mm motorized lens
- > 1/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 40 m
- > Micro SD memory, IP67, IK10
- > SMD Plus



IPC-HFW5541EP-ZE

5MP IR Vari-focal Bullet WizMind Network Camera

- > 1/2.7" 5Megapixel progressive scan CMOS
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > 20 fps@2592 × 1944, 50/60 fps@1080P (1920 × 1080)
- > WDR (120 dB), Day/Night (ICR), 3D DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS (DSS/PSS) & DMSS
- > 2.7 mm–13.5 mm motorized lens
- > 2/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 50 m
- > Micro SD memory, IP67, IK10



CAMÉRAS IP 6MP



IPC-HDBW4631EP-ASE

6MP IR Mini Dome Network Camera

- > 1/2.9" 6Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 triple-stream encoding
- > 20fps@6MP(3072x2048), 25/30fps@4MP(2688x1520)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.8mm fixed lens (3.6mm optional)
- > 1/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 30m
- > Micro SD memory, IP67, IK10, PoE



IPC-HFW4631TP-ASE

6MP WDR IR Mini Bullet Network Camera

- > 1/2.9" 6Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 triple-stream encoding
- > 20fps@6MP(3072x2048), 25/30fps@4MP(2688x1520)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.8mm fixed lens (3.6mm, 6mm optional)
- > Max. IR LEDs Length 80m
- > Micro SD Memory, IP67, IK10, PoE



IPC-HDBW5631EP-ZE

6MP WDR IR Dome Network Camera

- > 1/2.9" 6Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 dual-stream encoding
- > 20fps@6M(3072×2048),25/30fps@4M(2688×1520)
- > Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.7mm ~13.5mm motorized lens
- > Max. IR LEDs Length 50m
- > Micro SD card memory, IP67, IK10, PoE+



IPC-HFW5631EP-ZE

6MP WDR IR Bullet Network Camera

- > 1/2.9" 6Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 dual-stream encoding
- > 20fps@6M(3072×2048),25/30fps@4M(2688×1520)
- > Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.7mm ~13.5mm motorized lens
- > Max. IR LEDs Length 50m
- > Micro SD memory, IP67, IK10, PoE



CAMÉRAS IP 8MP



IPC-HDBW2831EP-S-S2

8MP Lite IR Fixed-focal Dome Network Camera

- > 8MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 8MP (3840 × 2160) @15 fps, and supports 2688×1520 (2688 × 1520) @25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 30 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection
- > Supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67, IK10 protection



IPC-HFW2831SP-S-S2

8MP Lite IR Fixed-focal Bullet Network Camera

- > 8MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 8MP (3840 × 2160) @15 fps, and supports 2688×1520 (2688 × 1520) @25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 30 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire · Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection
- > Supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67 protection



IPC-HDBW2831RP-ZAS-S2

8MP Lite IR Vari-focal Dome Network Camera

- > 8MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 8MP (3840 × 2160) @15 fps, and supports 2688×1520 @25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 60 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, local alarm, voltage detection, audio abnormal
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 GB Micro SD card
- > 12V DC/POE power supply
- > IP67, IK10 protection



IPC-HFW2831TP-ZS-S2

8MP Lite IR Vari-focal Bullet Network Camera

- > 8MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 8MP (3840 × 2160) @15 fps, and supports 2688×1520 (2688 × 1520) @25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > Built-in IR LED, max IR distance: 60 m
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > Rotation mode, WDR, 3D NR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire
- > Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection
- > Supports max. 256 GB Micro SD card
- > 12V DC/PoE power supply
- > IP67 protection



IPC-HDBW5831EP-ZE

8MP WDR IR Dome Network Camera

- > 1/2.5" 8Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 dual-stream encoding
- > 15fps@4K(3840×2160), 25/30fps@3M(2304×1296)
- > Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.7mm -12mm motorized lens
- > Max. IR LEDs Length 50m
- > Micro SD card memory, IP67, IK10, PoE+



IPC-HFW5831EP-ZE

8MP WDR IR Bullet Network Camera

- > 1/2.5" 8Megapixel progressive scan STARVIS™ CMOS
- > H.265&H.264 dual-stream encoding
- > 15fps@4K(3840×2160), 25/30fps@3Mp(2304×1296)
- > Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.7mm -12mm motorized lens
- > Max. IR LEDs Length 50m
- > Micro SD memory, IP67, IK10, PoE





IPC-HDBW4831EP-ASE

8MP IR Mini Dome Network Camera

- > 1/2.5" 8Megapixel progressive scan STARVISTM CMOS
- > H.265&H.264 triple-stream encoding
- > 15fps@4K(3840×2160), 25/30fps@3M(2304×1296)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.8mm fixed lens (4mm optional)
- > 1/1 Alarm in/out, 1/1 audio in/out
- > Max. IR LEDs Length 30m
- > Micro SD memory, IP67, IK10, PoE



IPC-HFW4831TP-ASE

8MP WDR IR Mini Bullet Network Camera

- > 1/2.5" 8Megapixel progressive scan STARVISTM CMOS
- > H.265&H.264 triple-stream encoding
- > 15fps@4K(3840×2160), 25/30fps@3M(2304×1296)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.8mm fixed lens (4mm optional)
- > Max. IR LEDs Length 80m
- > Micro SD Memory, IP67, IK10, PoE



CAMÉRAS IP 12MP



IPC-HFW81230EP-ZE

12MP IR Bullet Network Camera

- > 1/1.7" 12Megapixel progressive scan STARVISTM CMOS
- > H.265&H.264 triple-stream encoding
- > 20fps@12M(4000×3000), 25/30fps@4K(3840×2160)
- > DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 4.1mm ~16.4mm zoom lens
- > Max. IR LEDs Length 50m
- > Micro SD memory, IP67, IK10, PoE+



IPC-HDBW81230EP-ZE

12MP IR Dome Network Camera

- > 1/1.7" 12Megapixel progressive scan STARVISTM CMOS
- > H.265&H.264 triple-stream encoding
- > 20fps@12M(4000×3000), 25/30fps@4K(3840×2160)
- > DWDR, Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 4.1mm ~16.4mm zoom lens
- > Max. IR LEDs Length 50m
- > Micro SD memory, IP67, IK10, PoE+



CAMÉRAS IP AI SÉRIE 7



IPC-HDBW7442HP-Z AI

4MP IR Dome WizMind Network Camera

- > 4MP, 1/1.8" CMOS image sensor, low illuminance, high image definition
- > Max outputs 4MP (2688×1520) @50 fps/60 fps
- > H.264&H.265 coding, high compression ration
- > Wide dynamic, day/ night, 3D NR, AWB, HLC, BLC
- > ROI, SVC, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > With deep learning algorithm, it supports people counting, face recognition, perimeter protection etc
- > Alarm: 3 in, 2 out; audio: 1 in, 1 out; RS-485; BNC; supports max. 256 G SD card
- > 24V AC/12V DC/PoE power supply (the power ports are different depending on the power supply)
- > Five streams for three-channel HD video
- > IP67, IK10 protection grade
- > Anti-corrosion coating(optional)
- > 12V DC power output, max. current 165mA, easy for installation



IPC-HFW7442HP-Z AI

4MP IR Bullet WizMind Network Camera

- > 4MP, 1/1.8" CMOS image sensor, low illuminance, high image definition
- > Max outputs 4MP (2688×1520) @50 fps/60 fps
- > H.264/H.265 coding, high compression ration
- > Wide dynamic, day/night, 3D NR, AWB, HLC, BLC
- > ROI, SVC, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > With deep learning algorithm, it supports people counting, face detection, perimeter protection etc
- > Alarm: 3 in, 2 out; audio: 1 in, 1 out; RS-485; BNC; supports max. 256 G SD card
- > 24V AC/12V DC/PoE power supply (the power ports are different depending on the power supply)
- > Five streams for three-channel HD video
- > IP67, IK10 protection grade
- > Anti-corrosion coating(optional)
- > 12V DC power output, max. current 165mA, easy for installation



CAMÉRAS IP DE RECONNAISSANCE FACIALE



IPC-HDBW7442HP-Z4FR
4MP IR Dome WizMind Network Camera

- > 4MP, 1/1.8" CMOS image sensor, low illuminance, high image definition
- > Max outputs 4MP (2688×1520) @50 fps/60 fps
- > H.264&H.265 coding, high compression ration
- > Wide dynamic, day/night, 3D NR, AWB, HLC, BLC
- > ROI, SVC, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > With deep learning algorithm, it supports people counting, face recognition, perimeter protection etc
- > Alarm: 3 in, 2 out; audio: 1 in, 1 out; RS-485; BNC; supports max. 256 G SD card
- > 24V AC/12V DC/PoE power supply
- > Five streams for three-channel HD video
- > IP67, IK10 protection grade
- > 12V DC power output, max. current 165mA, easy for installation



IPC-HFW7442HP-Z4FR
12MP IR Bullet Network Camera

- > 4MP, 1/1.8" CMOS image sensor, low illuminance, high image definition
- > Max outputs 4MP (2688×1520) @50 fps/60 fps
- > H.264&H.265 coding, high compression ration
- > Wide dynamic, day/ night, 3D NR, AWB, HLC, BLC
- > ROI, SVC, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > With deep learning algorithm, it supports people counting, face recognition, perimeter protection etc
- > Alarm: 3 in, 2 out; audio: 1 in, 1 out; RS-485; BNC; supports max. 256 G SD card
- > 24V AC/12V DC/PoE power supply (the power ports are different depending on the power supply)
- > Five streams for three-channel HD video
- > IP67, IK10 protection grade
- > Anti-corrosion coating(optional)
- > 12V DC power output, max. current 165mA, easy for installation



CAMÉRAS IP PANORAMIQUE FISHEYE



IPC-EB5531P
5MP Panoramic Network Fisheye Camera



- > 1/2.7" 5Megapixel progressive scan CMOS
- > H.265&H.264 triple-stream encoding
- > 25fps@5MP(2592×1944), 25/30fps@3MP(2048×1520)
- > Smart Detection supported
- > WDR(120dB), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 1.4mm fixed lens
- > Built-in Mic
- > Micro SD memory, IP67, PoE



IPC-EBW8630P
6MP Panoramic Network IR Fisheye Camera

- > 1/1.8" 6Megapixel progressive scan STARVIS™ CMOS
- > H.265/H.264 triple-stream encoding
- > Max 25/30fps@6M(3072×2048)
- > Multiple dewarped Mode
- > Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Smart detection
- > Intelligent Function
- > Max. IR LEDs length 10m
- > Micro SD memory, IP67, IK10, PoE



IPC-EBW81242P
12MP Panoramic Network IR Fisheye Camera

- > 12MP, 1/1.7" CMOS image sensor
- > Max output 12MP (4000×3000)@30fps
- > 3D DNR, AWB, HLC, BLC, ROI, SVC, SMART H.264/H.265
- > People counting in multiple areas, queuing management in multiple areas, heat map (number of people /time), and track map
- > 2/2 Alarm in/out, 1/1 audio in/out
- > 12V DC/POE power support
- > IP67, IK10 protection



CAMÉRA ANPR LECTURE DE MATRICULE



ITC215-PW6M-IRLZF

Access ANPR Camera

- > Adopts high-performance CMOS image sensor and processor for in-depth extraction and analysis of vehicle information 24/7
- > Embraces deep learning algorithm for accurate recognition of vehicles without license plate, and vehicle model, vehicle logo, vehicle series, vehicle color, and more
- > Various signal, data and communication interfaces; supports connecting to extra devices, such as barrier
- > Built-in LED illuminator for simplified installation
- > Motorized vari-focal lens, easy for installation and commissioning
- > Integrated design with low power consumption, and IP67 protection grade



CAMÉRA DE COMPTAGE DES PERSONNES



IPC-HDW8341XP-3D

3MP Dual-Lens People Counting AI Network Camera

- > Two 1/2.8" 3Megapixel progressive scan STARVISTM CMOS
- > H.265&H.264 triple-stream encoding
- > 25fps@3MP(2048×1536)
- > WDR(120dB), Day/Night(ICR), 3DNR, AWB, AGC, BLC
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.8mm fixed lens (3.6mm optional)
- > Max. IR LEDs Length 10m
- > Micro SD memory, IP67, PoE
- > People Counting: Support line crossing people counting, region people counting



CAMÉRA THERMIQUE DE DETECTION TEMPERATURE DES PERSONNES



TPC-BF2221-HTM

Thermal Temperature Monitoring Camera

- > 256 × 192 Vanadium Oxide Uncooled FPA
- > Athermalized lens (thermal camera), focus-free
- > Smart linkage with strobe light & audio
- > Temperature Accuracy ±0.3°C with black body
- > Temperature Measurement Range: 30°C to 45°C
- > IP67; Micro SD storage



CAMÉRAS IP SPEED DOME



SD59225U-HNI

2MP 25x Starlight IR PTZ Network Camera

- > 1/2.8" 2Megapixel STARVIS™ CMOS
- > Powerful 25x optical zoom
- > Starlight technology
- > H.265 Encoding
- > Max. 50/60fps@1080P
- > Auto-tracking and IVS
- > Support PoE+
- > IR distance up to 150m
- > IP66



SD6CE225U-HNI

2MP 25x Starlight IR PTZ Network Camera

- > 1/2.8" 2Megapixel STARVIS™ CMOS
- > Powerful 25x optical zoom
- > Starlight technology
- > Max. 50/60fps@1080P
- > Auto-tracking and IVS
- > IR distance up to 200m
- > Support PoE+
- > IP67, IK10



SD5A225XA-HNR

2MP 25x Starlight IR WizSense Network PTZ Camera

- > 1/2.8" 2Megapixel STARVIS™ CMOS
- > Powerful 25x optical zoom
- > Starlight Technology
- > Max. 50/60fps@1080P
- > IR distance up to 150 m
- > SMD PLUS
- > Deep-learning-based perimeter protection
- > Auto-tracking and IVS
- > PoE+
- > IP67, IK10



SD6CE230U-HNI

2MP 30x Starlight IR PTZ Network Camera

- > 1/2.8" 2Megapixel STARVIS™ CMOS
- > Powerful 30x optical zoom
- > Starlight technology
- > Max. 50/60fps@1080P
- > Auto-tracking and IVS
- > IR distance up to 200m
- > Support PoE+
- > IP67, IK10



SD59230U-HNI

2MP 30x Starlight IR PTZ Network Camera

- > 1/2.8" 2Megapixel STARVIS™ CMOS
- > Powerful 30x optical zoom
- > Starlight technology
- > H.265 Encoding
- > Max. 50/60fps@1080P
- > Auto-tracking and IVS
- > Support PoE+
- > IR distance up to 150m
- > IP66



SD59232XA-HNR

2MP 32x Starlight IR WizSense Network PTZ Camera

- > 1/2.8" STARVIS™ CMOS
- > Powerful 32x optical zoom
- > Starlight technology
- > Max. 50/60fps@1080P
- > Deep-learning-based auto tracking and perimeter protection
- > Support PoE+
- > IR distance up to 150 m
- > SMD PLUS
- > IP66





SD6AL245U-HNI-IR

2MP 45x Starlight IR PTZ Network Camera

- > 1/2.8" 2Megapixel STARVIS™ CMOS
- > Powerful 45x optical zoom
- > Max. 50/60fps@1080P
- > Auto tracking and IVS
- > Support Hi-PoE
- > IR distance up to 300m
- > IP67



SD5A425XA-HNR

4MP 25x Starlight+ IR WizSense Network PTZ Camera

- > 1/1.8" 4Megapixel CMOS
- > Powerful 25x optical zoom
- > Starlight+ Technology
- > Max. 25/30fps@4MP
- > IR distance up to 150m
- > SMD PLUS
- > Deep-learning-based perimeter protection
- > Auto-tracking and IVS
- > PoE+
- > IP67, IK10



SD59430U-HNI

4MP 30x IR PTZ Network Camera

- > 1/3" 4Megapixel CMOS
- > Powerful 30x optical zoom
- > H.265 Encoding
- > Max. 25/30fps@4M/3M, 25/30/50/60fps@1080P
- > Auto-tracking and IVS
- > Support PoE+
- > IR distance up to 100m
- > IP66



SD59432XA-HNR

4MP 32x Starlight IR WizSense Network PTZ Camera

- > 1/2.8" STARVIS™ CMOS
- > Powerful 32x optical zoom
- > Starlight technology
- > Max. 25/30fps@4M
- > Deep-learning-based auto tracking and perimeter protection
- > Support PoE+
- > IR distance up to 150 m
- > SMD PLUS
- > IP66



SD6AE530U-HNI

5MP 30x IR PTZ Network Camera

- > 1/1.9" 6Megapixel STARVIS™ CMOS
- > Powerful 30x optical zoom
- > H.265 Encoding
- > Max. 20fps@6M, 25/30fps@5M/3M(Realtime)
- > Auto-tracking and IVS
- > Support Hi-PoE
- > IR distance up to 200m
- > IP67, IK10



SD8A840-HNF-PA

8MP 40x Starlight IR PTZ AI Network Camera

- > 1/1.8" 8Megapixel STARVIS™ CMOS
- > Powerful 40x optical zoom
- > Starlight technology
- > Perimeter protection
- > Metadata
- > Face detection
- > Auto-tracking
- > Smart wiper
- > IP67





K2 SMART LOCK

Say Goodbye to Keys

- > Multiple Ways to Unlock the Door
- > Multi-dimensional Biometric Fingerprint Recognition Technology
- > Fingerprint Scanner with Ergonomic Design and Super Wear-Resistant Material
- > Anti-Peeping Password
- > Wrong-Try Lock-Out
- > Tamper Alarm
- > Lock the Door from the Inside
- > Multi-dimensional Biometric Fingerprint Recognition Technology



LOOC

Actively keeps threats away from your home

- Night Vision
- 1080P
- Active Deterrence
- PIR Detection
- Two-way Talk
- IP65 Weatherproof
- Cloud



RANGER PRO

Hide the lens to protect your privacy

- 355° Rotation
- 1080P
- Smart Tracking
- Privacy Mask
- Night Vision
- Two-way Talk
- Cloud



RANGER 2

Hide the lens to protect your privacy

- Human Detection
- 1080P
- 360° Coverage
- Built-in Siren
- Smart Tracking
- Privacy Mode
- Abnormal Sound Alarm
- Night Vision
- Two-way Talk - Cloud



CUE 2C

Smart Monitoring with AI Human Detection

- Human Detection
- 1080P
- H.265
- Abnormal Sound Alarm
- Night Vision
- Built-in Mic
- Cloud



CUE 2

Smart Monitoring with AI Human Detection

- Human Detection
- 1080P
- H.265
- Abnormal Sound Alarm
- Night Vision
- Built-in Mic
- Cloud

ENREGISTREURS RÉSEAUX

NVR



NVR4104-P-4KS2

4 Channel Smart 1U 1HDD 4PoE Network Video Recorder

- > New 4.0 user interface, Security baseline 2.1
- > H.264, H.265, Smart H.264+, and Smart H.265+. H.265 auto switch
- > Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding
- > Supports mainstream cameras of ONVIF and RTSP protocols
- > P2P remote surveillance, video play on mobile device
- > VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K
- > AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD
- > Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches



NVR4108-8P-4KS2

8 Channel Smart 1U 1HDD 4PoE Network Video Recorder

- > New 4.0 user interface, Security baseline 2.1
- > H.264, H.265, Smart H.264+, and Smart H.265+. H.265 auto switch
- > Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding
- > Supports mainstream cameras of ONVIF and RTSP protocols
- > P2P remote surveillance, video play on mobile device
- > VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K
- > AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD
- > Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches



NVR4208-8P-4KS2

8 Channel 1U 8PoE 4K 2HDDs & H.265 Lite Network Video Recorder

- > 8-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch
- > Max 200 Mbps incoming bandwidth
- > Up to 8MP resolution for preview and playback
- > 8-channel decoding@1080p (30 fps)
- > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map
- > Support IPC UPnP, 8 PoE ports



NVR4216-16P-4KS2

16 Channel 1U 2HDDs 16PoE Network Video Recorder

- > New 4.0 user interface, Security baseline 2.1
- > H.264, H.265, Smart H.264+, and Smart H.265+. H.265 auto switch
- > Max. decoding capability: 8 × 1080p@30 fps. Supports adaptive decoding
- > Supports mainstream cameras of ONVIF and RTSP protocols
- > P2P remote surveillance, video play on mobile device
- > VGA/HDMI simultaneous video output, maximum resolution of HDMI is 4K
- > AI by Camera: Face detection, perimeter protection, IVS, people counting, heat map, and SMD
- > Supports remote configuration and management of IPC, such as setting parameters, getting information, and upgrading IPC of the same model in batches



NVR4216-4KS2

16 Channel 1U 4K & H.265 Lite Network Video Recorder

- > 16-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch
- > Max 200 Mbps incoming bandwidth
- > Up to 8MP resolution for preview and playback
- > 8-channel decoding@1080p (30 fps)
- > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map



NVR4232-4KS2

32 Channel 1U 4K & H.265 Lite Network Video Recorder

- > 32-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch
- > Max 200 Mbps incoming bandwidth
- > Up to 8MP resolution for preview and playback
- > 8-channel decoding@1080p (30 fps)
- > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map





NVR4232-16P-4KS2

**32 Channel 1U 16PoE 4K & H.265 Lite
Network Video Recorder**

- > 32-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264; H.265 auto switch
- > Max 200 Mbps incoming bandwidth
- > Up to 8MP resolution for preview and playback
- > 8-channel decoding@1080p (30 fps)
- > AI by Camera: Perimeter protection; SMD Plus; people counting; heat map
- > Support IPC UPnP, 16 PoE ports



NVR5216-4KS2

**16 Channel 1U 2HDDs 4K & H.265
Pro Network Video Recorder**

- > 16-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
- > Max 320 Mbps incoming bandwidth
- > Up to 24MP resolution for live view and playback
- > 1-channel fisheye dewarping (AI by NVR)
- > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map



NVR5216-16P-4KS2

**16 Channel 1U 2HDDs 16PoE 4K & H.265
Pro Network Video Recorder**

- > 16-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
- > Max 320 Mbps incoming bandwidth
- > Up to 24MP resolution for live view and playback
- > 1-channel fisheye dewarping (AI by NVR)
- > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map
- > Support IPC UPnP, 16 PoE ports



NVR5208-8P-4KS2

**8 Channel 1U 2HDDs 8PoE 4K & H.265
Pro Network Video Recorder**

- > 8-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
- > Max 320 Mbps incoming bandwidth
- > Up to 24MP resolution for live view and playback
- > 1-channel fisheye dewarping (AI by NVR)
- > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map
- > Support IPC UPnP, 8 PoE ports



NVR5216-8P-4KS2E

**16 Channel 1U 2HDDs 8PoE 4K & H.265
Pro Network Video Recorder**

- > 16-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
- > Max 320 Mbps incoming bandwidth
- > Up to 24MP resolution for live view and playback
- > 1-channel fisheye dewarping (AI by NVR)
- > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map
- > Support IPC UPnP, 8 PoE ports



NVR5416-16P-4KS2E

**16 Channel 1.5U 4HDDs 16PoE 4K
& H.265 Pro Network Video Recorder**

- > 16-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
- > Max 320 Mbps incoming bandwidth
- > Up to 24MP resolution for live view and playback
- > 1-channel fisheye dewarping (AI by NVR)
- > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map
- > Support IPC UPnP, 16 PoE ports



NVR5232-16P-4KS2E



**32 Channel 1U 2HDDs 16PoE
4K & H.265 Pro Network Video Recorder**



- > 32-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
- > Max 320 Mbps incoming bandwidth
- > Up to 24MP resolution for live view and playback
- > 1-channel fisheye dewarping (AI by NVR)
- > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map
- > Support IPC UPnP, 16 PoE ports

NVR5432-16P-4KS2E



**32 Channel 1.5U 4HDDs 16PoE 4K
& H.265 Pro Network Video Recorder**

- > 32-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
- > Max 320 Mbps incoming bandwidth
- > Up to 24MP resolution for live view and playback
- > 1-channel fisheye dewarping (AI by NVR)
- > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map
- > Support IPC UPnP, 16 PoE ports



NVR5816-16P-4KS2E



**16 Channel 2U 8HDDs 16PoE 4K
& H.265 Pro Network Video Recorder**

- > 16-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
- > Max 320 Mbps incoming bandwidth
- > Up to 24MP resolution for live view and playback
- > 1-channel fisheye dewarping (AI by NVR)
- > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map
- > Support IPC UPnP, 16 PoE ports



NVR5832-16P-4KS2E



**32 Channel 2U 8HDDs 16PoE 4K
& H.265 Pro Network Video Recorder**

- > 32-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
- > Max 320 Mbps incoming bandwidth
- > Up to 24MP resolution for live view and playback
- > 1-channel fisheye dewarping (AI by NVR)
- > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map
- > Support IPC UPnP, 16 PoE ports



NVR5864-16P-4KS2E



**64 Channel 2U 8HDDs 16PoE 4K
& H.265 Pro Network Video Recorder**

- > 64-channel IP video access
- > Smart H.265+/Smart H.264+/H.265/H.264/MJPEG; H.265 auto switch
- > Max 320 Mbps incoming bandwidth
- > Up to 24MP resolution for live view and playback
- > 1-channel fisheye dewarping (AI by NVR)
- > AI by Camera: Perimeter protection; face detection and recognition; SMD Plus; video metadata; ANPR; people counting; stereo analysis; crowd distribution; heat map
- > Support IPC UPnP, 16 PoE ports



NVR5832-R-16P-4KS2E



**32 Channel 2U 8HDDs 16PoE 4K
& H.265 Pro Network Video Recorder**

- > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG
- > Max 320Mbps Incoming Bandwidth
- > Supports RAID 0/1/5/10
- > Up to 12MP Resolution for Preview and Playback
- > 2HDMI/2VGA simultaneous video output
- > 1-8 PoE Ports Support 800m ePoE & EoC



NVR5864-R-16P-4KS2E



**64 Channel 2U 8HDDs 16PoE 4K
& H.265 Pro Network Video Recorder**

- > Smart H.265+/H.265/Smart H.264+/H.264/MJPEG
- > Max 320Mbps Incoming Bandwidth
- > Supports RAID 0/1/5/10
- > Up to 12MP Resolution for Preview and Playback
- > 2HDMI/2VGA simultaneous video output
- > 1-8 PoE Ports Support 800m ePoE & EoC





NVR608-32-4KS2

**32 Channel 2U 8HDDs Ultra series
Network Video Recorder**

- > New 4.0 user interface
- > 16-channel decoding@1080p (30 fps); self-adaptive decoding capability
- > Access, storage or forwarding at 384 Mbps
- > Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports
- > Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10
- > Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches
- > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis
- > N+M cluster. When the host fails, the standby device will continue to record; once the host recovers, video recorded on the standby device will be transmitted back



NVR608R-64-4KS2

**64 Channel 2U 8HDDs Ultra series
Network Video Recorder**

- > New 4.0 user interface
- > 16-channel decoding@1080p (30 fps); self-adaptive decoding capability
- > Access, storage or forwarding at 384 Mbps
- > Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports
- > Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10
- > Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches
- > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis
- > N+M cluster. When the host fails, the standby device will continue to record; once the host recovers, video recorded on the standby device will be transmitted back



NVR616R-64-4KS2

**64 Channel 3U 16HDDs Ultra series
Network Video Recorder**

- > New 4.0 user interface
- > 16-channel decoding @1080p (30 fps); self-adaptive decoding capability
- > Access, storage or forwarding at 384 Mbps
- > Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports
- > Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10
- > Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches
- > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis
- > N+M cluster. When the host fails, the standby device will continue to record; once the host recovers, video recorded on the standby device will be transmitted back



NVR608-64-4KS2

**64 Channel 2U 8HDDs Ultra series
Network Video Recorder**

- > New 4.0 user interface
- > 16-channel decoding@1080p (30 fps); self-adaptive decoding capability
- > Access, storage or forwarding at 384 Mbps
- > Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports
- > Supports RAID 0/1/5/10 Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10
- > Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches
- > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis
- > N+M cluster. When the host fails, the standby device will continue to record; once the host recovers, video recorded on the standby device will be transmitted back



NVR608-128-4KS2

**128 Channel 2U 8HDDs Ultra series
Network Video Recorder**

- > New 4.0 user interface
- > 16-channel decoding@1080p (30 fps); self-adaptive decoding capability
- > Access, storage or forwarding at 384 Mbps
- > Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports
- > Supports RAID 0/1/5/10 Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10
- > Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches
- > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis
- > N+M cluster. When the host fails, the standby device will continue to record; once the host recovers, video recorded on the standby device will be transmitted back



NVR616R-128-4KS2

**128 Channel 3U 16HDDs Ultra series
Network Video Recorder**

- > New 4.0 user interface
- > 16-channel decoding @1080p (30 fps); self-adaptive decoding capability
- > Access, storage or forwarding at 384 Mbps
- > Simultaneous video output for VGA and HDMI1; 4K heterogeneous output for the 2 HDMI ports
- > Multiple data mode such as Raid0, Raid1, Raid5, Raid6, and Raid10
- > Remote configuration and management of IPCs, such as setting parameters, acquiring information and upgrading IPCs of the same model in batches
- > AI-by-camera functions such as perimeter protection, face detection and recognition, SMD Plus, video metadata, ANPR and 3D behavior analysis
- > N+M cluster. When the host fails, the standby device will continue to record; once the host recovers, video recorded on the standby device will be transmitted back





IVSS7016DR

3U 16HDDs Intelligent Video Surveillance Server

- > Industry embedded micro-controller
- > Max 768Mbps incoming bandwidth
- > 256-channel IP video access
- > Supports RAID 0/1/5/6/10/50/60
- > 3 HDMI/1 VGA video output
- > Redundant power

SWITCHS POE



PFS4206-4P-96

4-Port PoE Managed Switch

- > Layer 2 managed PoE switch
- > MAC auto study and aging, MAC address list capacity is 8K
- > Support IEEE802.3af, IEEE802.3at, Hi-PoE standard
- > Support RSTP
- > Industrial wide temperature design
- > PoE Management



PFS4210-8GT-150

8-Port PoE Gigabit Managed Switch

- > Layer 2 network management PoE switch
- > Support IEEE802.3af, IEEE802.3at standard
- > Network Redundancy: STP/RSTP/MSTP
- > Support IPv4/IPv6, and DHCP
- > Network management based on SNMP
- > Configuration: Web, Telnet, CLI Command
- > QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- > Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- > Large data cache(4M), real-time transmission
- > MAC auto study and aging, MAC address list capacity is 8K
- > EMC high protection design



PFS4218-16GT-190

16-Port PoE Gigabit Managed Switch

- > Layer 2 network management PoE switch
- > Support IEEE802.3af, IEEE802.3at standard
- > Support Hi-PoE 60W
- > Network Redundancy: STP/RSTP/MSTP
- > Support IPv4/IPv6, and DHCP
- > Network management based on SNMP
- > Configuration: Web, Telnet, CLI Command
- > QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- > Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- > Large data cache(4M), real-time transmission
- > MAC auto study and aging, MAC address list capacity is 8K
- > EMC high protection design



PFS4226-24GT-240

24-Port PoE Gigabit Managed Switch

- > Layer 2 network management PoE switch
- > Support IEEE802.3af, IEEE802.3at standard
- > Support Hi-PoE 60W
- > Network Redundancy: STP/RSTP/MSTP
- > Support IPv4/IPv6, and DHCP
- > Network management based on SNMP
- > Configuration: Web, Telnet, CLI Command
- > QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- > Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- > Large data cache(4M), real-time transmission
- > MAC auto study and aging, MAC address list capacity is 8K
- > EMC high protection design



PFS5452-48GT4XF-400

Dahua 48-Port Gigabit Managed PoE Switch

- > Support static route, realizing layer 3 forwarding for network data.
- > Support virtual stack, virtualizing several switches into one to improve reliability and simplify configuration and management.
- > Support 10 Gbps uplink with 4 ports, realizing big data transmission without lags.
- > Support various management types.

SWITCHES NON-POE



PFS3106-4T

4-Port Ethernet Switch (Unmanaged)

- > 2-layer industrial level switch
- > Conform IEEE802.3, IEEE802.3u, IEEE802.3ab/z and IEEE802.3X standards
- > 100M/1000M self-adaptive SFP fiber port
- > Industrial wide temperature design



PFS3110-8T

8-Port Ethernet Switch (Unmanaged)

- > 2-layer industrial level switch
- > Conform IEEE802.3, IEEE802.3u, IEEE802.3ab/z and IEEE802.3X standards
- > 100M/1000M self-adaptive SFP fiber port
- > Industrial wide temperature design



PFS3016-16GT

16-Port Gigabit Switch (Unmanaged)

- > Layer 2 unmanaged access switch
- > All gigabit Ethernet ports
- > Lightning protection
- > Plug and play
- > Adopts metal enclosure
- > Good heat dissipation

CLAVIERS JOYSTICK



NKB5000

HD Network Control Keyboard

- > Keyboard to control
 - DAHUA Standalone DVR
 - DAHUA high speed dome
 - Central Management Platform
 - Network Video Server
- > RS232, RS485 & network connections (WLAN)
- > Four dimensional joystick control of PTZ functions
- > Support 4K decoding live view
- > Support 4CH HDMI output
- > Support snapshot and recording to U-disk
- > Support Video-Wall display control
- > Preset Position, Auto Scan, Auto Pan, Auto Tour & Pattern Control



NKB1000

Network Keyboard

- Keyboard to Control
 - > Dahua High Speed Dome
 - > Dahua Standalone DVR
 - > Network Video Server
- Connection
 - > RS485, RS422 (reserved), USB, RS232 & Network
- Functions
 - > Three Dimensional Joystick Control of PTZ Functions
 - > Preset Position, Auto Scan, Auto Pan, Auto Tour & Pattern Auxiliary Functions
 - > On-Screen Menu & User Operation Procedure Tips
 - > Connect to SmartPSS or DSS platform via USB



SOLUTION MOBILE HDCVI



DHI-MXVR4104

4 Channels H.265 1 HDD Mobile Video Recorder

- > Support penta-brid(HDCVI/AHD/TVI/CVBS/IP) video input
- > Support H.265/smart H.265 video compression
- > Support 4 channels 1080P realtime recording
- > VGA/TV simultaneous video output
- > Support 1 HDD and 1 SD card
- > Support face detection
- > Aviation connectors adopted
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS



WD20SPZX

- 2 TO
- Type de disque Standard
- Interface SATA-600
- Vitesse de rotation 5400 tours/min
- Débit de transfert 600 Mo/s



HAC-HMW3100P

1MP Mobile HDCVI IR Cube Camera

- > Max. 30fps@720P
- > HDCVI output (Aviation connector)
- > 2.8mm fixed lens
- > Max. IR length 20m, Smart IR
- > IP67, DC12V
- > Shock-proof



HAC-HMW3200P

2MP Mobile HDCVI IR Cube Camera

- > Max 30fps@
- > CVI/CVBS/AHD/TVI switchable
- > Built-in Mic
- > 2.1 mm fixed lens (2.8 mm optional)
- > Max. IR length 20 m, Smart IR
- > IP67, DC12V
- > Shock-proof



HAC-HDW1100GP-M

1MP Mobile HDCVI IR Eyeball Camera

- > Max 30fps@720P
- > HDCVI output (Aviation connector)
- > 3.6mm fixed lens (2.8mm optional)
- > Max. IR length 20m, Smart IR
- > IP67, DC12V
- > Shock-proof



HAC-HDW1220GP-M

2MP Mobile HDCVI IR Eyeball Camera

- > Max 30fps@1080P
- > HDCVI output (Aviation connector)
- > 3.6mm fixed lens (2.8mm, 6mm optional)
- > Max. IR length 20m, Smart IR
- > IP67, DC12V
- > Shock-proof





HAC-HDBW2241FP-M-A

2MP Mobile HDCVI IR Dome Camera

- > Starlight, 120dB true WDR, 3DNR
- > Max. 30fps@1080P
- > Audio in interface, built-in mic
- > HDCVI output (Aviation connector)
- > 3.6mm fixed lens (2.8mm optional)
- > Max. IR length 20m, Smart IR
- > IP67, IK10, DC12V±30%
- > IP6K9K, shock-proof



CVI EXTENSION CABLE (3M)

3 meter extension cable with female aviation connector to male aviation connector, for HDCVI cameras of vehicles



CVI EXTENSION CABLE (12M)

12 meter extension cable with female aviation connector to male aviation connector, for HDCVI cameras of vehicles



HAC-HMW3200DP-H/V

2MP Mobile HDCVI IR Cube Camera

- > Max 30fps@1080p
- > CVI/CVBS/AHD/TVI switchable
- > 2.8 mm fixed lens
- > Max. IR length 20 m, Smart IR
- > IP67, DC12V
- > Shock-proof



CVI EXTENSION CABLE (6M)

6 meter extension cable with female aviation connector to male aviation connector, for HDCVI cameras of vehicles



CVI EXTENSION CABLE (18M)

18 meter extension cable with female aviation connector to male aviation connector, for HDCVI cameras of vehicles

SOLUTION MOBILE IP



MNVR4104

4 Channels POE 1 HDD Mobile Video Recorder

- > Support 4 channels POE IP cameras input
- > Support H.265/smart H.265 video compression
- > Support 4 channels 4MP realtime recording
- > VGA, TV, HDMI simultaneous video output
- > Support 1 HDD, 3 USB2.0
- > Aviation connectors adopted
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS



WD20SPZX

- 2 TO
- Type de disque Standard
- Interface SATA-600
- Vitesse de rotation 5400 tours/min
- Débit de transfert 600 Mo/s



IPC-MW1230DP-HM12/VM12

2MP IR Mobile Network Camera

- > 1/2.7" 2Megapixel progressive scan CMOS
- > H.265&H.264 triple-stream encoding
- > 25/30fps@1080(1920×1080)
- > DWDR, Day/Night(ICR), 3DNR,AWB,AGC,BLC,
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.8mm fixed lens (3.6mm, 6mm optional)
- > Max. IR LEDs Length 30m(6mm lens)
- > IP67, IP6K9K
- > EN50155(Optional), E-MARK(ECE-Regulation No.10)
- > IP Filter,User Authentication
- > Supports motion detection, temper alarm and IPC disconnection alarm.
- > Supports watermark.



IPC-MBW4231P-AS/M12

2MP IR Mobile Network Camera

- > 1/2.8" 2Megapixel progressive scan STRAVIS™ CMOS
- > H.265&H.264 triple-stream encoding
- > 50/60fps@1080(1920×1080)
- > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC,
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.8mm fixed lens (3.6mm, 6mm optional)
- > Max. IR LEDs Length 30m
- > Micro SD memory, IP67, IK10, IP6K9K, PoE
- > E-MARK(ECE-Regulation No.10)



IPC-HDBW4231FP-M/M12

2MP IR Mini Dome Network camera

- > 1/2.8" 2Megapixel progressive scan STARVISTM CMOS
- > H.265&H.264 triple-stream encoding
- > 50/60fps@2M(1920×1080)
- > Smart Detection supported
- > WDR(120dB), Day/Night(ICR), 3DNR,AWB,AGC,BLC,
- > Multiple network monitoring: Web viewer, CMS(DSS/PSS) & DMSS
- > 2.8mm fixed lens (3.6mm, 6mm optional)
- > Max. IR LEDs Length 20m
- > Micro SD memory, IP67, IK10, PoE



IPC-EB5541P-M-AS

2MP Mobile HDCVI IR Cube Camera

- > 5MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
- > Outputs max. 5MP (2592 × 1944) @25/30 fps
- > H.265 codec, high compression rate, ultra-low bit rate
- > ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- > 120dB WDR, 3D DNR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- > Intelligent detection: Intrusion, tripwire, people counting in area
- > Abnormality detection: Motion detection, video tampering, scene changing, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, and voltage detection
- > Alarm: 1 in, 1 out; audio: 1 in, 1 out; supports max. 256 G Micro SD card, built-in Mic
- > 12V DC/PoE power supply, easy for installation
- > IP67, IK10 protection
- > Heat map for people counting. You can adjust the number of people, time threshold to generate a heat map, which can be exported.



ACCESSOIRES SOLUTION MOBILE



DH-MLCDF7-E

Widescreen TFT-LCD

- > 7-in. Widescreen TFT-LCD Monitor
- > LED Backlight
- > M12 A-coding Connector



M869

Microphone

- > frequency : 20-20KHz
- > Connect with MDVR
- > Talk with platform

MONITEURS



DHL19-F500
18.5" Monitor

- > Industrial level LCD panel, suitable for continuous 24/7 operation
- > Light and cost-effective plastic housing
- > High fidelity digital processing for a brilliant and vivid video
- > 5ms fast response time with no image blurring or ghosting
- > Low energy consumption, long service life



DHL22-L200
21.5" FHD Monitor

- > Industrial level LCD panel, suitable for continuous 24/7 operation
- > Light and cost-effective plastic housing
- > High fidelity digital processing for a brilliant and vivid video
- > 5ms fast response time with no image blurring or ghosting
- > Low energy consumption, long service life



LM27-F410
27" UHD LED Monitor

- > 4K Ultra-HD resolution
- > 1.07G colors, for a realistic and immersive visual experience
- > High fidelity digital processing for a brilliant and vivid video
- > 178°/178° extra-wide viewing angle for overall viewing performance
- > Professional thermal design to extend equipment lifespan
- > Built-in power, low energy consumption



LM28-S400
28" UHD LED Monitor

- > Industrial level LCD panel, suitable for continuous 24/7 operation
- > 4K Ultra-HD resolution
- > Using tamper-proof metal housing
- > Built-in 3D COMB filter and 3D noise reduction
- > 5ms response time for no motion blur, judder or ghosting
- > 1.07G colors, for a realistic and immersive visual experience
- > High fidelity digital processing for a brilliant and vivid video
- > Professional thermal design to extend equipment lifespan
- > Built-in power, low energy consumption
- > Support multiple signals, such as HDMI, DP, VGA, USB multimedia, Audio, RS232



LM32-F200
32" FHD Monitor

- > Light and cost-effective plastic housing
- > 178°H/178°V extra-wide viewing angle for overall viewing performance
- > High fidelity digital processing for a brilliant and vivid video
- > 8ms fast response time with no image blurring or ghosting
- > Support multiple signal inputs such as HDMI, VGA and USB
- > Built-in speakers
- > Physical button and infrared remote dual control mode
- > Low energy consumption, long service life



LM43-F200
43" FHD Monitor

- > Light and cost-effective plastic housing
- > suitable for continuous 24/7 operation
- > 178°H/178°V extra-wide viewing angle for overall viewing performance
- > High fidelity digital processing for a brilliant and vivid video
- > 8ms fast response time with no image blurring or ghosting
- > Support multiple signal inputs such as HDMI, VGA and USB
- > Built-in speakers
- > Physical button and infrared remote dual control mode
- > Low energy consumption, long service life





LM43-S400

43" UHD LED Monitor

- > Industrial level LCD panel, suitable for continuous 24/7 operation
- > 4K Ultra-HD resolution
- > Using tamper-proof metal housing
- > Built-in 3D COMB filter and 3D noise reduction
- > 8ms response time for no motion blur, judder or ghosting
- > 1.07G colors, for a realistic and immersive visual experience
- > High fidelity digital processing for a brilliant and vivid video
- > 178°/178° extra-wide viewing angle for overall viewing performance
- > Professional thermal design to extend equipment lifespan
- > Built-in power, low energy consumption
- > Support multiple signals, such as HDMI, DP, VGA, USB multimedia, Audio, RS232



LM49-S200

49" FHD Monitor

- > Suitable for continuous 24/7 operation
- > Using tamper-proof metal housing
- > Slim 5.9mm narrow bezel design
- > 8ms response time for no motion blur, judder or ghosting
- > High fidelity digital processing for a brilliant and vivid video
- > 178°/178° wide uninterrupted viewing angle
- > Professional thermal design to extend equipment lifespan
- > Built-in speakers, low energy consumption
- > Support multiple signals, such as HDMI, CVBS, VGA, USB 2.0, Audio, RS232



LM55-S400

55" UHD LED Monitor

- > Industrial level LCD panel, suitable for continuous 24/7 operation
- > 4K Ultra-HD resolution
- > Using tamper-proof metal housing
- > Built-in 3D COMB filter and 3D noise reduction
- > 6ms response time for no motion blur, judder or ghosting
- > 1.07G colors, for a realistic and immersive visual experience
- > High fidelity digital processing for a brilliant and vivid video
- > 178°/178° wide uninterrupted viewing angle
- > Professional thermal design to extend equipment lifespan
- > Built-in power, low energy consumption, ultra-quiet
- > Support multiple signals, such as HDMI, DP, VGA, USB multimedia, Audio, RS232



LM43-F410

43" UHD LED Monitor

- > 4K Ultra-HD resolution
- > Built-in 3D COMB filter and 3D noise reduction
- > 8.5ms response time for no motion blur, judder or ghosting
- > 1.07G colors, for a realistic and immersive visual experience
- > High fidelity digital processing for a brilliant and vivid video
- > 178°/178° extra-wide viewing angle for overall viewing performance
- > Professional thermal design to extend equipment lifespan
- > Built-in power, low energy consumption



LM50-F410

50" UHD LED Monitor

- > 4K Ultra-HD resolution
- > Built-in 3D COMB filter and 3D noise reduction
- > 8.5ms response time for no motion blur, judder or ghosting
- > 1.07G colors, for a realistic and immersive visual experience
- > High fidelity digital processing for a brilliant and vivid video
- > 178°/178° extra-wide viewing angle for overall viewing performance
- > Professional thermal design to extend equipment lifespan
- > Built-in power, low energy consumption



LM55-F410

55" UHD LED Monitor

- > 4K Ultra-HD resolution
- > Built-in 3D COMB filter and 3D noise reduction
- > 8ms response time for no motion blur, judder or ghosting
- > 1.07G colors, for a realistic and immersive visual experience
- > High fidelity digital processing for a brilliant and vivid video
- > 178°/178° extra-wide viewing angle for overall viewing performance
- > Professional thermal design to extend equipment lifespan
- > Built-in power, low energy consumption



CONTRÔLE D'ACCÈS POINTEUSES



ASA3213GL-MW
FACT Time Attendance Terminal

- > 4.3-inch LCD touch screen; resolution 480 × 272
- > With 2MP wide-angle dual lens, white LED illuminator, IR light
- > Support face, card and password attendance
- > Support 500 users, 500 face images, 500 cards, 150,000 records and work without network
- > Face-camera distance: 0.3 m–1.5 m
- > Face verification accuracy 99.5%; face comparison speed 0.3 s per person; low false recognition rate; support liveness detection



ASA1222G
Time & Attendance Terminal

- > Adopts 32-bit processor
- > Mechanical buttons, LCD operating interface
- > Built-in high capacity rechargeable lithium battery, up to 2600mAh
- > Supports Mifare card/ID card reading distance 1 cm–3 cm, card swiping
- > Fingerprint verification response time ≤0.5 s, fingerprint recognition
- > FAR≤0.00004%, FRR≤0.15%
- > Supports three attendance modes: fixed, manual/auto and forced
- > Support shift setting by department and person
- > Support attendance data import and export from USB flash drive
- > Support personnel data, config import and export from USB flash drive
- > Supports attendance record search
- > Supports software attendance and voice prompt
- > Supports online update
- > Supports 0 s–60 s setting for screen off
- > Operating temperature: 0°C to +55°C, operating humidity: ≤93%



ASA1222E-S
Time & Attendance Terminal

- > TCP/IP based
- > External electronic bell
- > 2.4 inches TFT colorful screen
- > Extremely speed verification
- > Multiple verification methods (FP/PWD, only FP, only PWD)
- > USB flash upgrade firmware
- > Generate Smart Time Attendance reports in standalone
- > 6 kinds of attendance events: Check In/Out, Break In/Out, Over Time In/Out
- > Daylight saving time
- > T9 text input
- > two user roles: administrator and normal user
- > Administrator operation record display
- > All users allowed to query his attendance records
- > Human voice operation prompts



ASA1222E
Standalone Time Attendance

- > 2.4 inches TFT colorful screen
- > Multiple verification methods (FP/PWD, only FP, only PWD)
- > Bell Schedule
- > Extremely speed verification
- > USB flash upgrade firmware
- > USB flash export import user information, fingerprint, shifts
- > USB flash export attendance report
- > T9 input method
- > Voice indicate
- > All users allowed to query his attendance records



CONTRÔLE D'ACCÈS LECTEURS AUTONOMES



ASI7214Y

Face Recognition Access Control and Time Attendance Terminal

- > 7 inch LCD, touchscreen, resolution 1024 (H) × 600 (V).
- > Human face images, fingerprints, cards and passwords can be recorded
- > Support unlock through face, card (ID/IC card), password, and their
- > With face detection box; the largest face among faces that appear
- > Face recognition distance is 0.3 m–2 m, human height range is 1.1
- > Face verification accuracy > 99%; face comparison speed ≤ 0.5s per
- > Profile faces can be recognized; face recognition angle can be
- > Supports 30,000 users, 30,000 cards, 30,000 passwords, and 50
- > Support liveness detection.
- > Supports duress alarm, tamper alarm, intrusion alarm, door contact
- > Has six user levels: general users, patrol users, blacklist users, VIP
- > Attendance records can be uploaded to the management platform.



ASI1212D

Fingerprint Standalone

- > Touch keyboard and LCD display
- > Support 30,000 valid cards & 150,000 records
- > Support multiple cards (default IC card) ("D" means ID EM card)
- > Support card, password, fingerprint and combination
- > TCP/IP to PC
- > Support P2P add device
- > Wiegand or RS-485 interface to reader
- > Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- > Anti-passback, multi-card open
- > Support 128 efficient time and holiday schedules
- > USB import/export configuration or log file;

CONTRÔLE D'ACCÈS CENTRALES + LECTEURS



ASC1202C-D

Two Door Two Way Access Controller

- > Support 100,000 valid cards & 150,000 records
- > Support multiple cards
- > Support card, password, fingerprint and combination
- > TCP/IP interface to PC
- > Wiegand or RS-485 interface to readers (2 door)
- > Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- > Anti-passback, multi-door interlock, multi-card open
- > Support 128 efficient time and holiday schedules
- > Watch dog function ensure device free from halting
- > Surface mounted installation
- > Accumulator battery extension



ASC2204C-H

Four Door Master Access Controller

- > Support 200,000 valid cards & 150,000 records
- > CAN bus can cascade 16 sub controller modules
- > Support multiple cards
- > Support card, password, fingerprint and combination
- > TCP/IP interface
- > Wiegand or RS-485 interface to readers
- > Door close time out alarm, intrusion alarm, duress alarm and tamper alarm
- > Global anti-passback, multi-door interlock, multi-personal open, remote verification unlock
- > Web service can be used to configure sub controller
- > Support 128 efficient time and holiday schedules
- > Built-in RTC, support DST
- > Watch dog function ensure device free from halting
- > Surface mounted installation
- > Accumulator battery extension
- > Onvif Profile C, CGI, SDK to the third party platform





ASC2102B-T

Two Door Slave Access Control Module

- > Support 20,000 valid cards & 30,000 records
- > Support multiple cards
- > Support card, password, fingerprint and combination
- > Only work with ASC2204-H with CAN bus
- > Wiegand or RS-485 interface to readers
- > Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- > Anti-passback, multi-door interlock, multi-personal open
- > Support 128 efficient time and holiday schedules
- > Watch dog function ensure device free from halting
- > Surface mounted installation



ASR1102A(V2)

Fingerprint RFID Reader

- > RS-485 protocol
- > Default IC (Mifare) card ("-D" means ID EM card)
- > Support card, fingerprint
- > Up to 3000 fingerprints capacity
- > Blue backlight
- > Watch dog function ensure device free from halting
- > Beep and indicator
- > Surface mounted installation



ASR1100B

Water-proof RFID Reader

- > Support RS485, Wiegand34 protocol
- > 13.56MHz(Mifare)
- > 125KHz(EM-ID)
- > Water-proof design
- > An indicator light with red, green, and blue light
- > Watch dog function ensure device free from halting
- > Surface mounted installation
- > IP66 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)



ASC2104B-T

Four Door Slave Access Control Module

- > Support 20,000 valid cards & 30,000 records
- > Support multiple cards
- > Support card, password, fingerprint and combination
- > Only work with ASC2204-H with CAN bus
- > Wiegand or RS-485 interface to readers
- > Door time out alarm, intrusion alarm, duress alarm and tamper alarm
- > Anti-passback, multi-door interlock, multi-personal open
- > Support 128 efficient time and holiday schedules
- > Watch dog function ensure device free from halting
- > Surface mounted installation



ASR2201D-B

Slim Water-proof Bluetooth Reader

- > Wiegand34(26 optional) bits RS-485 protocol
- > Support OSDP;
- > 13.56MHz(Mifare)
- > 125KHz(EM-ID)
- > Water-proof design
- > Red, blue and green indicator LEDs
- > Surface mounted installation



ASR1200E

Water-proof RFID Reader

- > Wiegand34(26 optional) bits RS-485 protocol
- > 13.56MHz(Mifare)
- > 125KHz(EM-ID)
- > Water-proof design
- > Red, blue and green indicator LEDs
- > Surface mounted installation



CONTRÔLE D'ACCÈS ACCESSOIRES



ASM100
CARD ISSUER

- > Power supply by USB port
- > Support IC card (Mifare card) with frequency 13.56MHz



ASM202
Fingerprint Enrollment Reader

- > No driver installation, plug and play
- > USB power supply and communication
- > Optical fingerprint module



ASF905
Stainless Steel Exit Button

- > Professional circuit design, no mechanical failure
- > Use stainless steel material
- > Normally open/closed functions, flexible application
- > 500000 times fatigue test and durability
- > Access control project designated accessory products



ASF921
Emergency Break Glass Button

- > Photoelectric control technology to prevent the mechanical failure
- > Use fire retardant material, convenient installation
- > Normally open/closed functions, flexible application
- > 500000 times fatigue test and durability
- > Access control project designated accessory products



ASF280A
Single Door Magnetic Lock

- > 280KG Anti-pull
- > Built-in reverse current protection device(MOV)
- > Aluminum shell with high strength alloy material
- > Electromagnetic suction work completely, there is no mechanical failure
- > Can be set DC12V or DC24V
- > The residual magnetic design proof, wear materials
- > Double lock body insulation treatment



ASF280B
Double Door Magnetic Lock

- > 280KG * 2 Anti-pull
- > Built-in reverse current protection device(MOV)
- > Aluminum shell with high strength alloy material
- > Electromagnetic suction work completely, there is no mechanical failure
- > Can be set DC12V or DC24V
- > The residual magnetic design proof, wear materials
- > Double lock body insulation treatment



ASF702
Electric Strike lock

- > Anti-pull 500kg
- > Special design, the lock bolt can adjust the distance
- > Especially suitable for the metal frame hole installed directly
- > 100,000 times aging test qualified
- > The surface temperature of the lacquer that bake, durable and beautiful



ASF802
Electric Drop bolt

- > Photoelectric control technology to prevent the mechanical failure
- > Ultra-low temperature design, more safe and more durable
- > Ultra low power design, more durable and more environmental protection
- > 500,000 electricity aging test
- > Built-in reverse current protection circuit
- > A microprocessor chip control circuit



ASF102S
Door Closer

- > Door weight 40-60kg, door width 950mm
- > 180° without positioning
- > Carbon steel material, 300,000 times
- > Temperature: -30-60°C

VIDEOPHONE SOLUTION VILLA



KTP01(S)

IP Villa Outdoor Station & Indoor Monitor

IP Villa Door Station

- > 2MP CMOS camera
- > Mechanical button
- > Night vision & voice indicator
- > 160° angle of view
- > Group call
- > Aluminium alloy plate
- > IK07&IP65 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- > Surface mounted and flush mounted
- > Support standard PoE

IP Indoor Monitor

- > IPC surveillance
- > Alarm integration
- > High performance
- > Embedded 8GB SD card
- > Support standard PoE



KTA01

4-Wire indoor monitor KIT

- > Screen dimension: 7 inch
- > Indoor monitor function: Unlock, video call, volume adjustment, and doorway monitoring
- > Quantity of outdoor station and indoor monitor: 2 outdoor station + 3 indoor monitor
- > Applicable scenario: Villa

VIDEOPHONE SOLUTION RESIDENTIELLE



VTO7541G

Digital Face Recognition Outdoor Station

- > Anodized aluminium alloy middle frame
- > 8 inch capacitive touch screen and high definition IPS screen; resolution: 800 (H)×1280 (V)
- > Face, fingerprint, password, and card unlock
- > Face verification accuracy>99%; face comparison time ≤0.2s per person; false recognition rate Face profiles can be recognized, the profile angle range is 0°–90°
- > Support liveness detection
- > Full duplex communication
- > Outdoor stations can be managed through the platform; voice communication between mobile app and platform
- > 2 MP low illuminance wide dynamic dual camera; white light fill light and IR fill light, fill light brightness can be adjusted
- > Support duress alarm, tamper alarm, and fire alarm
- > IK07; IP66 (Apply silica gel to gaps between the device and the wall. Liquid sodium silicate is recommended. For details, see the quick start guide.)
- > Surface mount and flush mount



VTO6531H

Face Recognition Door Station

- > 4.3 inch IPS display; screen resolution 800×480
- > 2MP CMOS; true WDR
- > Face-camera distance: 0.3 m–2 m; human height: 1.1 m–2.4 m (lens ground distance: 1.4 m)
- > Touch button; IP65
- > Operating temperature: -30°C to +60°C
- > Auto light illumination reduces light pollution
- > Multiple unlock modes: Password unlock, IC card unlock, remote unlock and face unlock
- > Support 20,000 users, 10,000 face images, and 10,000 cards
- > Face recognition speed: 0.2 second per person
- > Support liveness detection
- > Support full duplex; management platform, and voice call through APP
- > Support SIP server, and can manage 200 indoor monitors at most
- > Support duress alarm, tamper alarm, and door sensor timeout alarm
- > Various unlock status display modes protect user privacy



VTH2421FW-P

Digital VTH

- > 7" TFT Capacitive touch screen, 1024 x 600
- > IPC surveillance
- > Alarm integration
- > High performance & Cost-effective
- > Embedded 8GB SD card
- > Support standard PoE



VTH5222CH-S1

2-Wire IP Indoor Monitor

- > 7" TFT Capacitive touch screen
- > IPC surveillance(VTNS1006A-2 needed)
- > Alarm integration
- > Micro SD card optional, max 32GB
- > Record & Snapshot(SD card needed)



VTNS1006A-2

2-wire Switch

- > Decent appearance
- > Protocol network power supply switch
- > Connect max 6 indoor monitors with the 2-wire cable, transfer the signal and power together

STOCKAGE



TF-C100/256GB

C100 MicroSD Memory Card

- > Adopts mainstream flash memory cell; superior performance and long service life.
- > Four types of protection: High and low temperature resistant, waterproof, anti-magnetic, and anti X-ray; adapts to various environments.
- > Meets various user needs such as recording videos, taking photos, listening to music, playing games, and storing data.
- > Compatible with various digital products.



TF-C100/64GB

C100 MicroSD Memory Card

- > Adopts mainstream flash memory cell; superior performance and long service life.
- > Four types of protection: High and low temperature resistant, waterproof, anti-magnetic, and anti X-ray; adapts to various environments.
- > Meets various user needs such as recording videos, taking photos, listening to music, playing games, and storing data.
- > Compatible with various digital products.



TF-C100/32GB

C100 MicroSD Memory Card

- > Adopts mainstream flash memory cell; superior performance and long service life.
- > Four types of protection: High and low temperature resistant, waterproof, anti-magnetic, and anti X-ray; adapts to various environments.
- > Meets various user needs such as recording videos, taking photos, listening to music, playing games, and storing data.
- > Compatible with various digital products.



DISQUES DURS

Disque dur interne HDD

- | | |
|--------|-------|
| > 10TB | > 4TB |
| > 8TB | > 3TB |
| > 6TB | > 2TB |
| | > 1TB |

MICROS EXTERNES



HAP120

Hi-fidelity Pickup

- > Use high sensitivity, all directional microphone head and omnidirectional microphone, clear and natural sound;
- > Lightning protection, power polarity transposition protection and electrostatic protection.



HAP320-V

Hi-fidelity Pickup

- > Use metal shell, surface is through plating processing;
- > Use high sensitivity waterproof and dustproof microphone head, pickup clear sound;
- > Ambient noise cancellation (ANC) technology;
- > Waterproof and dustproof level are IP66.

BOITES DE JONCTION



PFA121
Water-proof Junction Box

- >Aesthetic design
- >Material: aluminum
- >IP66 junction box



PFA122
Water-proof Junction Box

- >Aesthetic design
- >Material: aluminum
- >IP66 junction box



PFA130-E
Water-proof Junction Box

- >Neat & Integrated design
- >Material: Aluminum
- >IP66 junction box



PFA137
Water-proof Junction Box

- >Aesthetic design
- >Material: aluminum
- >IP66 junction box

SUPPORTS DE FIXATION



PFA150
Pole Mount Bracket

- >Material: SECC & SUS304
- >Pole mount bracket
- >Aesthetic design



PFB300C
Ceiling Mount Bracket

- >Aesthetic design
- >Material: aluminum & PC
- >Ceiling mount bracket

CABLES ETHERNET



PFM920I-6U-U
UTP CAT6 Cable

- > 305 m (1000 ft)/carton UTP CAT6, power over Ethernet, compatible with one cable
- > High-purity oxygen-free copper conductor
- > Customized PVC outer sheath; ANSI UL CM flame retardant class certified
- > 10-year warranty



PFM922I-6UN-C
UTP CAT6 Cable

- > 305.0 m (1000 ft)/carton UTP CAT6, power over Ethernet, compatible with one cable
- > Manufacturing excellence
- > Customized PVC outer sheath; meet CE CPR Eca flame retardant class certified
- > 10-year warranty



PFM922I-6UN-C-100
UTP CAT6 Cable

- > 100 m (328 ft)/carton UTP CAT6, power over Ethernet, compatible with one cable
- > Manufacturing excellence
- > Customized PVC outer sheath; CE CPR Eca flame retardant class certified
- > Top-notch Quality Commitment for 10 Years

TESTEURS



PFM907
Integrated Mount Tester

- > Support IP, HDCVI/AHD/HDTVI/CVBS;
- > Highly compatible with ONVIF protocol;
- > POE power supply/receiving & 12V/2A power output;
- > 7" TFT HD capacitive touch screen(1920*1200);
- > Two replaceable polymer lithium batteries 18.5Wh*2;
- > Support WiFi test including spectrum, signal strength test @2.4G/5G Band;
- > Support TDR network cable test;
- > Support digital multi-meter function;
- > Support optical power meter test function



PFM900-E
Integrated Mount Tester

- > 4.0" TFT screen, 800 × 480 resolution
- > H.264/H.265 decoding display for IPC
- > HDCVI/AHD/TVI/CVBS video display control
- > Support SD and HD direct switch
- > 12V/2A DC power supply for the camera
- > Support RS-485 control, and audio test
- > Length and attenuation tests of the network cable
- > Functions of digital multimeter

CÂBLE COAXIAL



CÂBLE COAXIAL 500M
RG59+2DC



CÂBLE COAXIAL 300M
RG59+2DC



CÂBLE COAXIAL 200M
RG59+2DC



CÂBLE COAXIAL 100M
RG59+2DC

ALIMENTATION



DC-12V-1A
Transformateur electronique 12v/1A



DC-12V-2A
Transformateur electronique 12v/2A



BLOC ALIMENTATION
5A/4CH



BLOC ALIMENTATION
10A/9CH



BLOC ALIMENTATION
20A/18CH



BLOC ALIMENTATION
30A/18CH

CONNECTEURS



VIDEO BALUN
Transmission de la vidéo en temps réel
par câble réseau ethernet



BNC
Connecteur BNC

CONNECTEURS D'ALIMENTATION



FICHE DC MALE
Connecteur DC Male 12V



FICHE DC FEMELLE
Connecteur DC Femelle 12V

ARMOIRES INFORMATIQUES



ARMOIRE INFORMATIQUE
12U - 9U - 6U - 4U



ARMOIRE INFORMATIQUE
18U - 27U - 42U



NOTRE ÉQUIPE COMMERCIALE EST À VOTRE DISPOSITION

Tanger-Tétouan-Fnidiq-Larache-Ksar Ikbir (et les environs)

+212 662 847 766

projets@tthgroupe.com

+212 662 132 995

contact@tthgroupe.com

El Houceima-Nador-Oujda (et les environs)

+212 661 830 374

m.safroui@tthgroupe.com

Rabat-Salé-Kénitra (et les environs)

+212 666 289 013

a.mohamed@tthgroupe.com

Fès - Meknès (et les environs)

+212 666 646 871

a.assarehane@tthgroupe.com

Casablanca-Mohammedia (et les environs)

+212 662 750 522

sales@tthgroupe.com

Marrakech (Et Les Environs)

+212 666 972 009

info@tthgroupe.com

Agadir (et les environs)

+212 661 381 041

y.saifdine@tthgroupe.com

En Afrique

+212 667 196 127

ba.ibrahima@tthgroupe.com